



WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

<p>(51) International Patent Classification ⁶ : G11B 7/24, 7/09, 3/90</p>	A1	<p>(11) International Publication Number: WO 97/45836</p> <p>(43) International Publication Date: 4 December 1997 (04.12.97)</p>
<p>(21) International Application Number: PCT/US97/09122</p> <p>(22) International Filing Date: 28 May 1997 (28.05.97)</p> <p>(30) Priority Data: 08/655,961 31 May 1996 (31.05.96) US</p> <p>(71) Applicant: THE 3DO COMPANY [US/US]; 600 Galveston Drive, Redwood City, CA 94063 (US).</p> <p>(72) Inventors: DAVIS, Hedley, C.; 4140 Sedge Street, Fremont, CA 94555 (US). NELSON, Craig, A.; 203 Pebble Beach Drive, Aptos, CA 95003 (US). KELLER, Glenn, J.; 157 Escobar Avenue, Los Gatos, CA 95032 (US).</p> <p>(74) Agents: WOLFELD, Warren, S. et al.; Fliesler, Dubb, Meyer and Lovejoy, Suite 400, Four Embarcadero Center, San Francisco, CA 94111-4156 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
<p>(54) Title: OPTICAL DISK WITH COPY PROTECTION</p>		
<p>(57) Abstract</p> <p>Copy-protected optical disk format (512), optical disk recording apparatus for creating disks having such formats and optical disk reading apparatus for reading disks having such formats and for determining whether the disks are authentic (514). In one aspect, an authentic optical disk has data bit indications along a spiral centerline of the disk, and these data bit indications define a radial wobble which has substantially greater energy at a predefined frequency fcpw (such as fcc/392) than at a frequency of fcc/196, where fcc is the spatial channel clock frequency (538). In another aspect, an authorized optical disk has data bit indications along a substantially spiral centerline of the disk, according to a channel clock whose frequency varies across the disk (528). The disk further has stored thereon an indication of the number of such channel clock cycles which occur along a predetermined test segment of the centerline, optionally together with a pointer to the test segment (526).</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 97/45836

PCT/US97/09122

OPTICAL DISK WITH COPY PROTECTION

5

BACKGROUND OF THE INVENTION**Field of the Invention**

The invention relates to copy protection
10 mechanisms for optical disks.

Description of Related Art

An optical disk, such as an audio CD, a CD-ROM,
or a "write once" optical disk (known as "CD-WO"), has
15 data recorded on it along a substantially spiral
centerline beginning at an interior radius and
continuing out to larger radii. Data is recorded on
the disk in the form of bit indications consisting of
lands and pits alternating along the centerline, the
20 arcuate length of each land or pit indicating the
number of sequential "zero" bits in the data. The data
to be recorded on the disk is converted from binary to
a format known as eight-to-fourteen modulation (EFM),
which guarantees that all runs of zeroes will be at
25 least two but no more than 10 bits in length. The EFM
data is written at a constant linear velocity (CLV)
along the spiral, such that each '1' in the EFM data
produces a transition from land to pit or vice versa,
and each '0' in the EFM data produces no transition.
30 Since the EFM data is provided to the recording
apparatus at a fixed bit rate (known as a channel clock
frequency), and since the recording takes place at a
constant linear velocity, the pits and lands will each
have an arcuate length which is between $3 T_{cc}$ and $11 T_{cc}$,
35 inclusive, where T_{cc} can be thought of as a channel
clock period expressed in units of arcuate length.

WO 97/45836

PCT/US97/09122

-2-

Specifically, for a nominal 1x speed optical disk drive, the data bit rate is specified to be 4.3218 million channel bits per second. A 1x disk drive spins at a constant linear velocity of 1.2-1.4 meters per second CLV, depending on program length. Thus expressed in channel clock cycles per unit of arcuate length, the channel clock frequency is approximately 3.087 channel clock cycles per arcuate micron (for a recording speed of 1.4 meters per second), and 3.6015 channel clock cycles per arcuate micron (for a recording speed of 1.2 meters per second).

Manufacturers have developed optical disk reproduction (i.e., playback or reading) equipment which spin the disk at 2x, 4x, 6x or more times the nominal 1x speed of 1.2-1.4 arcuate meters per second. It is therefore useful to speak of channel clocks in terms of cycles per unit of arcuate length on the disk because whereas the temporal frequency of the data stream to or from the disk is higher at higher disk spin rates, the spatial channel clock frequency of the data as recorded on the disk remains constant.

Background on encoding, recording, pressing and playback methods and systems for optical disks can be found in Chapter 12 of Pohlmann, "Principles of Digital Audio", Second Edition (1994), incorporated herein by reference.

Common manufacturing processes for optical disks begin with a glass plate which is coated with a photoresist (or with some other selectively removable material). The disk is spun in a "cutting" machine, and a writing beam (such as a laser beam or an ion beam) traverses the spiral path from the inside of the disk to the outside of the disk. The cutting machine modulates the writing beam in response to an EFM signal

WO 97/45836

PCT/US97/09122

-3-

arriving from a digital master source, as the beam traverses the disk. If the selectively removable material was a photoresist, the disk is then developed. At this point, the material exhibits the desired lands and pits along the spiral centerline. As described in more detail in Pohlmann, a number of metal stamper disks are created from the glass master, and the stampers form the desired pits and lands into plastic disks in an injection molding process. Thus the pits and lands that appear on a final optical disk have the same arcuate lengths as was dictated by the arriving EFM data bit rate and the linear velocity of the glass master disk spinning in the cutting machine.

The pits and lands alternating along the spiral centerline of the resulting optical disk define alternating arcuate regions of high and low reflectivity which can be sensed by a pickup device in an optical disk reader. In an optical disk reader, the disk is spun at the nominal 1.2-1.4 meters per second CLV (the same as the spin rate at which the disk was originally recorded), or at a higher rate for 2x, 4x, etc. disk drives. A read head traverses the spiral centerline of the disk, directing a laser beam thereon and sensing the reflections. The channel clock frequency is recovered from the sensed reflections in a well known manner, for example by using a phase locked loop. See, for example, Muto U.S. Patent No. 5,436,770, entitled "DISC RECORDING AND/OR REPRODUCING APPARATUS HAVING AN ENLARGED LOCKING RANGE FOR CORRECTLY PHASED INTERNAL CHANNEL CLOCKS", incorporated by reference herein.

The channel clock frequency recovered from the sensed reflections is used to control the constant linear velocity of the spin rate, as well as to clock

WO 97/45836

PCT/US97/09122

-4-

the EFM data into appropriate processing circuitry for converting it back into binary form.

As described more fully in Pohlmann, the read head is maintained on the spiral centerline of the disk through a closed loop control system. If the read head wanders off the track centerline (or the centerline deviates from circular), a change in the reflected light takes place. This change is detected by the optical disk playback equipment, which produces a tracking error signal. The tracking error signal is fed back to a head-positioning mechanism which adjusts the position of the read head radially, until the tracking error returns to 0. The bandwidth of the tracking servo system is on the order of 100Hz.

A CD-WO format optical disk is similar to a CD-audio or CD-ROM disk in its use of a spiral centerline, alternating regions of high and low reflectivity along the centerline for recorded data, EFM data encoding, and spatial channel clock frequency. A blank CD-WO disk is pre-grooved to enable the recorder to track a proper spiral. The pre-groove also contains a radial groove wobble having a frequency of 22.05kHz (for a 1x speed drive), and timecode addressing information is frequency modulated thereon. In terms of spatial frequency, the write-only groove wobble frequency translates to $f_{cc}/196$, where f_{cc} is the spatial channel clock frequency. That is, the wobble completes one cycle in every 196 channel clock cycles along the centerline. The CD-WO format, including its pre-groove wobble, is described in detail in Van Der Zande U.S. Patent No. 4,901,300, incorporated by reference herein. The 22.05kHz wobble frequency is advantageous for the facility of its use to control the recording spin rate. In particular, the spin rate can be controlled by

WO 97/45836

PCT/US97/09122

-5-

comparing the phase of the groove wobble with the phase of a reference signal of a frequency which can be derived simply by dividing down the 4.3218MHz data bit rate frequency. Additionally, the 22.05kHz frequency is outside the frequency band required for recording the EFM signal, thereby avoiding interaction between the wobble signal and the EFM signal. It is also outside the frequency band of the tracking servo system, thereby minimizing any effect on tracking.

Producers of optical disk titles spend a large amount of capital and resources in developing unique and valuable information. In order to encourage such producers to provide such information, they must be able to anticipate a reasonable rate of return. Producers achieve a rate of return by selling disks in large volume, and/or by licensing others to sell authorized copies in large volume. Unfortunately, there is presently a risk that third-party counterfeiters or pirates will illegally or improperly copy optical disks and sell them, undermining the return on the investment which the rightful producer should reasonably be able to expect. With the risk of unauthorized copying, legitimate producers may not be able to earn an adequate return on their investment, ultimately leading to higher prices and reduced varieties of available CD-ROM titles.

The methods which can be used by pirates to illegally copy optical disks can be divided into two primary categories: image copying and data stream copying. In image copying techniques, a legitimate optical disk is chemically and/or lithographically converted or copied to a new mastering disk. The new mastering disk is then used to press any desired number of copies. In the data stream copying techniques, the

WO 97/45836

PCT/US97/09122

-6-

data on a legitimate optical disk is read from the disk linearly, for example using an ordinary optical disk player. The data stream is either maintained in EFM form, or is translated to binary and later back to EFM form. Either way, the resulting EFM data stream is provided to a cutting machine for cutting a new master. The new master is then used to press any desired number of illegal copies. Alternatively, the EFM data stream can be provided to a CD-WO recorder for simply recording an illegal copy directly. It is the later category of pirating, that is data stream copying, that is addressed by the present invention.

A number of techniques have been developed for preventing unauthorized or illegal data stream copying of optical disks. One such technique provides for optical disks to be manufactured with a copy protection code at a predetermined location on the disk. Many data stream copying techniques for pirating disks do not read this location of the disk. Thus the illegal copy will not contain the code at the proper location. Optical disk readers are then designed to reject any disk that does not have the copy protection code at the proper location on the disk.

The above copy protection technique suffers from the problem that it does not prevent copying by a device which copies all of the data on the disk, including the copy protection code. Such devices exist or are easily constructed. Illegal copies made from such machines are not distinguishable from legal copies by examination of the copy protection code.

Another technique that has been proposed for preventing serial data copies involves including a serial copy management code in the table of contents (TOC) area of the disk. This method, known as the

"serial copy management system" (SCMS), allows copying only if the SCMS code on the disk so indicates. When a disk for which copying is allowed is copied, the copying machine is supposed to change the SCMS code to a code which indicates that no further copies are permitted. Copying machines are supposed to preclude copying of any disk which already has an SCMS code indicating that no further copies are permitted.

The SCMS technique suffers from the same problems
10 as the first-mentioned copy protection technique above.
In particular, the technique is easily undermined by a
copying machine which reads and transmits all of the
data from the original disk unchanged, including the
original SCMS code.

15 Another series of techniques for preventing unauthorized serial data stream copying of optical disks is described in published European patent application No. 94302516.3, Publication No. 0 637 023 A1, filed April 11, 1994, inventor Ozaki, incorporated
20 by reference herein in its entirety. In Ozaki, optical pits which are irregularly shaped are written intermittently throughout the optical disk. Special hardware and software for writing the irregularly shaped pits is required. Additionally, complex
25 hardware and software may be necessary to detect the various irregularly shaped pits and arrangements at specified frames on the disk, in order to determine whether or not the disk is an authorized copy.

Accordingly, there is a need for an optical disk
30 format, as well as corresponding recording and
reproduction apparatus, which is able to prevent the
illegal or unauthorized serial data type copying of
optical disks without requiring complex hardware and
software reproduction devices and/or irregularly shaped

WO 97/45836

PCT/US97/09122

-8-

pits on the optical disk, and which will not be defeated by a copying machine that is able to read and transmit all of the data on the disk.

5

SUMMARY OF THE INVENTION

The invention involves a number of unique optical disk formats, as well as optical disk recording apparatus for creating disks having such formats and optical disk reading apparatus for reading disks having such formats and for determining whether the disks are authentic. In one aspect, roughly described, an optical disk has data bit indications along a spiral centerline of the disk, and these data bit indications define a radial wobble which has substantially greater energy at a predefined frequency f_{CPW} than at a frequency of $f_{CC}/196$. In another aspect, the radial wobble has substantially greater energy at a frequency f_{CPW} than at a predefined reference frequency f_{REF} , where f_{CPW} is approximately equal to an integer sub-harmonic of $f_{CC}/196$. In an embodiment, the wobble has substantially greater energy at $f_{CC}/392$ than at $f_{CC}/196$. Since normal data stream copying methods do not copy wobble patterns, the absence of the proper wobble pattern on a disk can easily be detected by an optical disk reader to expose an unauthorized copy.

In another aspect of the invention, usable separately or together with one of the wobble aspects just described, an optical disk has data bit indications along a substantially spiral centerline of the disk, according to a channel clock whose frequency varies across the disk. In one embodiment, the channel clock variations are introduced intentionally by the recording equipment, whereas in another embodiment, the channel clock variations are merely those which are

WO 97/45836

PCT/US97/09122

-9-

inherent in any conventional disk recording apparatus.

The disk further has stored thereon an indication of

the number of such channel clock cycles which occur
along a predetermined test segment of the centerline,

5 optionally together with a pointer to the test segment.

The data can be stored on the disk in a number of ways,
such as in normal data at a predetermined address on
the disk, or in a subcode channel, or as an encoding on
a wobble pattern. Since normal data stream copying

10 techniques do not copy the exact channel clock rates on
the disk, and since the copying equipment will
inherently introduce its own channel clock variations
across the resulting disk, the predetermined test

segment on the copy will not have the number of channel

15 clocks as that specified by the data indicating the
number of channel clock cycles to expect along the test
segment. An optical disk reader can easily detect this
discrepancy to identify an unauthorized copy disk.

20 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a portion of a track on an
optical disk incorporating an aspect of the present
invention.

25 Figs. 2-4 and 8 are block diagrams of optical
disk recording devices according to the invention.

Figs. 5 and 9 are block diagrams of optical disk
readers according to the invention.

30 Figs. 6 and 10-11 are flowcharts describing the
operation of optical disk readers according to the
invention.

Fig. 7 is a plan view of an optical disk
according to the invention.

Fig. 12 is a block diagram of the signal
processor shown in Fig. 8.

DETAILED DESCRIPTION

A. Optical Disk Format

The pits 10, 12 and 14 in the embodiment of
25 Fig. 1 all have a standard width, in conformity with
conventional optical disks. However, as shown in
Fig. 1, the centers of the pits deviate slightly,
radially about the virtual centerline 22, thereby
appearing to "wobble". The wobble pattern is similar
30 to the CD-WO pre-groove wobble pattern described in the
above-incorporated Van Der Zande patent, except that
the frequency of wobble is approximately 11.025kHz for
a 1x speed disk drive, which translates to
approximately one cycle of wobble per 392 channel clock

WO 97/45836

PCT/US97/09122

-11-

cycles. In an embodiment, the wobble frequency on the disk is exactly 11.025kHz (for a 1x disk drive) or one cycle per 392 channel clock cycles.

When the disk is read, the centerline tracking
5 mechanism will produce a tracking error signal which matches the wobble pattern. The frequency of 11.025kHz is too high for the tracking system to actually move the head radially in accordance with the wobble, but the deviation of the pits from the centerline 22 is
10 kept small enough such that lands and pits are still detected reliably by the laser pickup light sensor even at the maximum deviation from the centerline 22. The frequency of 11.025kHz is selected in order to take advantage of existing software and hardware which
15 detects the 22.05kHz wobble (which translates to $f_{cc}/196$, where f_{cc} is the spatial channel clock frequency) used on a CD-WO optical disk. Such hardware and software requires only small modifications or additions in order to detect an 11.025kHz wobble.
20 Indeed, wobbles having an approximate frequency equal to any integer sub-harmonic of 22.05kHz (i.e., any integer sub-harmonic of $f_{cc}/196$) can benefit from existing hardware and software.

Only legal or authorized copies of an optical
25 disk have the wobble pattern having the predefined wobble copy protection frequency of $f_{cpw} = f_{cc}/392$. If a counterfeiter attempts to make a serial data-type copy of the disk, without special equipment for wobbling the write head radially at the proper
30 frequency, the resulting copy will not exhibit the proper wobble. The reading apparatus detects whether an optical disk is authorized or not by determining whether the frequency spectrum of the tracking error signal, upon reading the disk, contains sufficient

WO 97/45836

PCT/US97/09122

-12-

energy at the predefined wobble copy protection frequency f_{CPW} . If so, then the disk is considered authentic. If not, then the reading apparatus asserts an "alarm" signal. In response to the alarm signal, the apparatus can reject the disk, shut down, provide an audible or visible error message, or anything else that is appropriate.

It has been discovered that merely detecting whether the energy at f_{CPW} exceeds a predefined absolute threshold, may not be sufficient to reliably determine authenticity of the disk. It has been found that noise and other effects can sometimes produce energy at f_{CPW} even on unauthorized disks which do not have the proper wobble pattern. In particular, the tracking error signal used by the playback device to detect the wobble is merely a binary tracking zero crossing signal. This is a binary signal indicating which side of center the pickup is on. The signal is very noisy, containing energy in many frequency bands, and subject to unpredictable factors such as vibration, dust, playback unit manufacturing tolerances, eccentricity of rotation, and so on. As such, detection of the absolute energy content in the wobble pattern at f_{CPW} is not a very reliable way to detect whether the disk is an authorized copy.

Therefore, in an embodiment of the invention, the playback unit determines authenticity by comparing the energy of the tracking error signal at the copy protection frequency $f_{CPW} = f_{CC}/392$, to the energy in the tracking error signal at some other reference frequency f_{REF} . The disk is determined to be authentic only if the ratio of energy at f_{CPW} is substantially greater than the energy at f_{REF} . For example, the disk may be determined to be authentic only if the energy at f_{CPW} exceeds 2.0

WO 97/45836

PCT/US97/09122

-13-

times the energy at f_{REF} . In a further embodiment, the reference frequency f_{REF} is equal to the CD-WO wobble frequency f_w . Thus the system rejects the disk if the energy of the error signal at approximately $f_{cc}/196$ is greater than a predefined factor times the energy at $f_{cc}/392$.

In the embodiment of Fig. 1, the wobble pattern is consistent along the entire spiral centerline along which data is recorded. This permits detection of unauthorized copies to be continuous, rather than only intermittent. In addition, both the recording and reading apparatus are greatly simplified since no mechanism is required for writing or reading the wobble pattern only at particular positions along the spiral centerline. However, in another embodiment, the wobble pattern is present only intermittently along the length of the spiral centerline 22.

Additionally, note that the wobble pattern in the embodiment of Fig. 1 follows a relatively pure sinewave pattern about the centerline 22. In an embodiment, this sinewave pattern can be considered a carrier frequency, and data can be encoded thereon, for example by phase, frequency or amplitude modulation.

B. Mastering Apparatus

Fig. 2 is a block diagram of one embodiment of a recording device for producing an optical disk master exhibiting the wobble pattern of Fig. 1. Another embodiment might use an ablation writing technique instead of a laser and photoresist technique. Referring to Fig. 2, a laser source 240 produces a writing beam 210. The beam 210 is modulated by an optical modulator 241 in response to the EFM signal arriving over a signal line 212. The resulting modulated beam 214 turns on or off in response to the ones and zeroes in

WO 97/45836

PCT/US97/09122

-14-

the EFM signal arriving on line 212. The modulated beam 214 next passes through an optical deflector 242, the output 245 of which illuminates a spot on the photoresist of the glass master 243 spinning below.

5 The write head (comprising the laser source 240, the optical modulator 241 and the optical deflector 242) traverses a spiral path from an inside radius of the disk 243 to an outside radius of the disk 243, and a spindle motor 216 spins the disk 243 at a constant
10 linear velocity relative to the writing head. As shown in Fig. 2, the optical deflector 242 deflects the beam 245 very slightly radially in response to a wobble signal 248 generated by a signal generator 247. Note that whereas Fig. 2 shows the write head projecting the
15 writing beam onto one surface of the disk 243, another embodiment could just as easily project it onto the other surface. Additionally, note that as used herein, a write head moveable radially "relative to" a disk includes an embodiment in which the write head moves
20 and the disk remains stationary (except for its spin), and also includes an embodiment in which the write head remains stationary and the disk moves. It is only the "relative" radial movement that is significant.

The signal generator 247 contains a free running
25 oscillator, the output of which provides the wobble control signal 248. Since the cutting machine in Fig. 2 spins the disks 243 at only 1x speed, the oscillator in signal generator 24 produces the signal 248 to oscillate at 11.025kHz.

30 As previously described, the wobble pattern on the disk can include data encoded thereon, such as by frequency, phase or amplitude modulation of the oscillating pattern. Therefore, in another embodiment to Fig. 2, the signal generator 247 receives the data

WO 97/45836

PCT/US97/09122

-15-

to be encoded onto the wobble pattern and modifies the wobble signal 248 in response thereto. The optical deflector 242 deflects the beam 245 radially in accordance with the wobble signal 248, and the desired pattern is recorded on the disk 243.

After the entire disk 243 is recorded, the photoresist is developed, stamper disks are formed, and plastic optical disks are mass produced, all in a conventional manner. The resulting optical disks contain wobble patterns such as that shown in Fig. 1.

Fig. 3 illustrates another cutting machine similar to that of Fig. 2. The only difference is that the machine in Fig. 3 includes a sync detector 218 which has an input connected to receive the EFM signal 212, and an output connected to the signal generator 247. As described in more detail in the above-incorporated Pohlmann book, the bit stream of the EFM signal 212 is divided into frames, each of which includes a synchronization (sync) field. The sync field appears at a rate of once every 588 channel clock cycles of the EFM signal 212, and is typically used by an optical disk reader to ensure that it is spinning the disks at the desired constant linear velocity. In the embodiment of Fig. 3, sync detector 218 detects these sync fields and provides a sync timing signal 220 to signal generator 247 when they occur. The signal generator 247 resets the oscillator in response to the sync timing signal, thereby ensuring that the frequency of wobble signal 248 has the proper relationship to the channel clock frequency f_{cc} as it appears on the disk 243. In another embodiment, the sync timing signal is provided as a reference signal to a phase locked loop, which then produces the wobble signal 248 at the proper frequency. In yet another embodiment, the channel

PCT/US97/09122

clock itself is recovered from the EFM signal 212 and used to produce the wobble signal 248.

Fig. 4 illustrates a cutting machine which is similar to that of Fig. 3, except the sync detector 222 also extracts the header information from each frame of the EFM signal 212. The header information contains an address of the frame as it will appear on the disk 243. The processor 224 determines from the address in the current header whether a wobble pattern is to be recorded on the disk in the current frame, and if so, asserts a gating signal via a line 246 to the signal generator 247. The signal generator 247 generates the wobble signal only when the gating signal 246 is asserted. In this manner, the cutting machine in Fig. 4 forms the wobble pattern on the disk 243 only within particular desired frames along the spiral centerline of the disk.

C. Reproduction Apparatus

Fig. 5 is a block diagram of an optical disk reader according to the invention. It comprises a motor 510 spinning an optical disk 512. A laser pickup 514 illuminates a spot on the disk 512 with a laser beam 516. Actually, for a three beam tracking system, arrow 516 represents three laser beams. The return beam(s) 518 are sensed by one or more optical sensing devices. The main beam generates an RF data signal 520 which is provided to an RF amplifier and phase lock loop (PLL) 522. In a conventional manner, the phase lock loop extracts the channel clock from the RF data and provides it to a motor drive servo 524, which maintains the motor 510 spinning at the desired constant linear velocity. The RF amplifier and phase lock loop 522 provide the channel bit data stream to an EFM demodulator 526 which demodulates the EFM codes.

WO 97/45836

PCT/US97/09122

-17-

The output signal from EFM demodulator 526 is provided to a signal processor 528 which, in response to the channel clock provided by RF amplifier and phase lock loop 522, converts the EFM signal into the desired
5 binary data output.

The optical sensing devices in the laser pickup 514 also provide a focus feedback signal to a focus servo 530, which controls a vertical actuator on the laser pickup 514 to maintain proper focus of the beam
10 on the optical disks 512. The optical sensors in the laser pickup 514 also produce a tracking error signal in a conventional manner, which is provided to a tracking servo 532. To the extent of frequencies in the tracking error signal which are low enough, the
15 tracking servo 532 controls an actuator in the laser pickup to deflect the beam slightly in the radial direction. If larger radial adjustments are required, a pickup servo 534 moves the entire pickup 514 in the radial direction.

20 In an aspect of the invention, the tracking error signal from the laser pickup 514 is also provided to a processor 536, which contains a wobble detection program 538 and a partial hardware or software fast Fourier transform (FFT) unit 540. Alternatively, the
25 wobble detection program 538 and/or fast Fourier transform unit 540 can be located on an external host. Only a partial FFT is required because the technique requires determination of the energy content in only two frequency bands.

30 Fig. 6 is a flow chart of the wobble detection program 538 in Fig. 5. In a step 680, the program first waits until the optical disk 512 is set in the optical disk reader. When it is set, in a step 681, the wobble detection program 538 uses the partial FFT

WO 97/45836

PCT/US97/09122

-18-

540 to determine the amount of energy in the tracking error signal which is present at frequencies $f_{cc}/196$ and $f_{cc}/392$. For 1x disk drive, this corresponds to determining the amount of energy in the tracking error signal at 22.05 kHz and 11.025 kHz, respectively. The processor 536 may use the channel clock signal from the RF amplifier and phase lock loop 522 to assist in this calculation.

In a step 683, the program calculates the ratio of the energy at $f_{cc}/392$ to the energy at $f_{cc}/196$. In a step 684, it is determined whether the ratio is less than a predefined threshold. If so, then in a step 685, the program asserts an alarm signal 542 (Fig. 5) and takes some action such as ceasing reproduction of the digital signal. The disk 512 is an illegal copy. If the ratio exceeds the threshold, then the disk is considered authentic, and the program ends without stopping reproduction. Alternatively, the program can return to step 681 to test for authenticity repeatedly.

In another embodiment, the signal processor 528 provides addressing information to the processor 536, indicating the address of each frame then being read by the laser pickup 514. The processor 536 executes the wobble detection program 538 only when the addressing information indicates that certain predetermined frames are then being read by the laser pickup 514.

II. EMBODIMENT 2 - RECORDING SPEED VARIATIONS

A. Optical Disk Format

When an optical disk is read, the channel clock is derived from the RF data read by the laser pickup, and used to maintain the disk spinning at a rate that produces channel data at a constant channel clock rate. If the channel clock speeds up slightly for any reason,

WO 97/45836

PCT/US97/09122

-19-

the system automatically compensates by slowing down the spin rate, and vice versa. It can be seen that an optical disk reader can easily accommodate small variations in the channel clock rate without upsetting its operation in any way. An aspect of the invention takes advantage of this feature by recording at a predetermined location on the disks, the number of channel clocks which are present within a predefined arcuate segment (for example, one revolution) of the spiral centerline on the disk. The channel clock variations can be introduced by the cutting machine due to inherent or deliberate motor speed variations, and/or can be deliberately introduced by varying the input EFM data rate.

Fig. 7 is a symbolic plan view of an optical disk 710 according to this aspect of the invention. The disk has lands and pits alternating along a conventional spiral centerline 22, only two parts of which are shown symbolically in Fig. 7. Two segments 712 and 714 of the spiral are shown, each occupying a single revolution of the disk 710. The segments 712 and 714 are shown adjacent to each other in the drawing for simplicity of illustration, but in general, they are not necessarily adjacent. The disk 710 also includes another segment 716 of the spiral 22, which is the length of one data frame. Included in this data frame is a pointer to segment 712 (such as the address of segment 712), together with an indication of the number of channel clocks which are actually included in segment 712. The frame 716 also includes the same information for segment 714.

Although optical disk recording devices, including both cutting machines and CD-WO recorders, attempt to maintain a constant linear velocity upon

WO 97/45836

PCT/US97/09122

-20-

recording, slight variations in temperature or optical disk spin rate inevitably causes slightly different numbers of channel clocks to be recorded in each particular arcuate segment of the spiral. In fact, once a nominal writing speed of 1.2-1.4 meters per second is chosen, the specifications still allow the spin rate to vary within a tolerance of ± 0.01 meters per second.

Accordingly, if a counterfeiter attempts to make illegal or unauthorized copies of the disk 710 of Fig. 7 using a data stream copying technique, inevitably, the number of channel clock periods recorded in segments 712 and 714 of the copy will not exactly match the number which exist in segments 712 and 714 in the original. But since a data stream copy does not change any data, no corresponding adjustment will be made to the data in frame 716 on the copy. Therefore, on the unauthorized copy, frame 716 will contain binary data indicating that segment 712 contains a different number of channel clocks than is actually present in segment 712. Similarly, frame 716 will also contain binary data indicating that segment 714 contains a number of channel clocks different from what is actually contained in segment 714. The optical disk reader can therefore use this information to determine that the disk is an unauthorized copy.

Note that whereas the channel clock speed variations which produced the disk 710 in Fig. 7 were inherent in the recording apparatus, in another embodiment the channel clock speed variations are produced intentionally in the recording device in a manner described below.

On the disk 710, two test segments 712 and 714 are used for copy protection. In another embodiment,

WO 97/45836

PCT/US97/09122

-21-

only one test segment is used. In yet another embodiment, numerous test segments are used.

Also on the disk 710, pointers to the segments 712 and 714, as well as the number of channel clocks to expect in such segments, are stored as ordinary data in segment 716. In another embodiment, this information is stored in a sub-code channel of the disk. In yet another embodiment, this information is encoded, for example by phase, frequency or amplitude modulation, onto a wobble pattern on the disk such as that shown in Fig. 1. Indeed, one embodiment of the invention includes an optical disk using both copy protection schemes of Fig. 1 and Fig. 7. For example, the lands and pits defining the spiral centerline on the disk of Fig. 7, also define a wobble about such centerline as shown in Fig. 1. Data which points to the segment 712, and further indicates the number of channel clocks to be expected in segment 712, is encoded onto the wobble pattern at some known location on the disk, but the wobble pattern nevertheless has a spatial frequency spectrum with substantially greater energy at $f_{cc}/392$ than at $f_{cc}/196$.

In yet another embodiment, referred to herein as a "relative data amount" embodiment, the disk does not contain a segment 716 indicating the number of channel clocks to be expected in either of the segments 712 or 714. Rather, the difference, ratio, or other comparison function of the number of channel clocks contained in the two segments on an authentic disk is within a predetermined range. The disk may be produced using a cutting machine which intentionally varied the channel clock frequency to ensure that the criteria was met. A counterfeiter who uses a serial data stream copying technique to make unauthorized copies of the disk

WO 97/45836

PCT/US97/09122

-22-

generally will not know to introduce such substantial variations in the channel clock frequency in the two segments 712 and 714. The optical disk player will therefore be able to detect counterfeiting since the ratio (or difference or other comparison function) of channel clocks in the two segments on the illegal copy will not be within the required range. (Note that in an embodiment, the comparison function of the number of channel clocks contained in the two test segments can be defined to consider the number of channel clocks contained in other test segments as well.)

It will be appreciated that if the two test segments on the disk have the same angular length (e.g., each constitutes one revolution), by nature they will contain different numbers of channel clocks. This is because the segments are recorded along a spiral centerline, which inherently results in different average radii of different segments. The radius-based channel clock count differential is not a problem for the "relative data amount" technique, however, because the difference between the two channel clock counts due to the radial difference is very small compared to the difference that can be introduced intentionally, especially if the two test segments are near each other radially. For example, a track near the outer third of a disk contains nominally more than 1,000,000 channel clocks per revolution. In this region of the disk, a nearly imperceptible variation of 0.1% in the channel clock frequency will produce a variation of over 1000 channel clocks per revolution. A 0.1% variation in channel clock frequency is well within the specifications, and the playback apparatus is easily able to accommodate it. On the other hand, if the two test segments are chosen to be about one second apart

WO 97/45836

PCT/US97/09122

-23-

(3-7 tracks), then a difference of less than 200 channel clocks per revolution would be expected due solely to the radial difference. Therefore, playback equipment designed to test for a channel clock count difference in the range of, say, 500-1500 channel clocks, would easily be able to distinguish between authentic disks (on which the channel clock is intentionally varied by 0.1% between the two test segments) and unauthentic disks (on which the difference between the two channel clock counts arises exclusively (or almost exclusively) due to the radial difference).

In one embodiment, the radius-based channel clock count difference is used to advantage. In particular, the two test segments are disposed at substantially different average radii on the disk, but the spatial channel clock frequency is adjusted so that both segments contain the same number of channel clock cycles (or the difference between the numbers of channel clock cycles is within a predefined range). In yet another embodiment (sometimes referred to herein as a track-to-track alignment embodiment), the channel clock frequencies in the two test segments are controlled such that a particular kind of mark, such as a sync mark, occurs at (or approximately at) a predefined angular distance apart. The predefined angular distance translates to a predefined temporal distance (i.e., time difference) when the disk is being spun at a predetermined rate on playback. Thus the playback equipment will be able to determine authenticity by looking for the mark in the second test segment at a predetermined time (or time range) after it is detected in the first test segment. Playback

WO 97/45836

PCT/US97/09122

-24-

apparatus for use in the track-to-track alignment embodiment is discussed further below.

B: Recording Apparatus

Fig. 8 is a block diagram of a cutting machine which incorporates the speed variation aspect of the present invention. Referring to Fig. 8, the write head, including laser source 240, optical modulator 241 and optical deflector 242, are the same as the corresponding components of Fig. 2. Similarly, the disk 243 is spun at a constant linear velocity by motor 216, as in Fig. 2. In addition, the apparatus in Fig. 8 also includes a sensor 850 which is positioned adjacent to the spindle of motor 216, and which senses whenever the spindle makes a complete revolution. The sensor 850 provides a signal to a processor 853 indicating each revolution of the spindle (and therefore of the disk 243).

The EFM input signal 212, instead of being provided directly to the optical modulator 241, instead is provided to a signal processor 846, the output 812 of which is provided to the optical modulator 241. The signal processor 846 is also connected to the processor 853.

In operation, the signal processor 846 initially simply passes the EFM signal arriving on line 212 directly to the optical modulator 241 via the line 812. The photoresist on the disk 243 is exposed in a spiral manner, beginning at an inner radius and proceeding to an outer radius. The sensor 850 indicates to the processor 853 each time the disk 243 completes one revolution in the writing process. At the same time, signal processor 846 provides a channel clock signal to the processor 853. With these two signals, the processor 853 is able to count the number of channel

WO 97/45836

PCT/US97/09122

-25-

clocks actually recorded on the disk within each revolution (as delimited by the sensor 850). When the processor 853 determines that the write head is now writing to segment 712 (Fig. 7) of the disk 243, it makes a note of the number of channel clocks recorded in that segment. Similarly, when the processor 853 determines that the write head is now writing to segment 714, it makes a note of the number of channel clocks recorded in that segment. Note that the channel clock counts made by processor 853 are in revolutions delimited by sensor 850, which may not coincide exactly with the test segments 712 and 714. However, the number of channel clocks counted in a sensor-delimited revolution that overlaps with a test segment will be close enough for an approximation of the number of channel clocks actually recorded in the test segment. Alternatively, the processor 853 can improve the approximation by interpolation or extrapolation from the number of channel clocks counted in sensor-delimited revolutions.

At some later time during the cutting process, the processor 853 causes the signal processor 846 to substitute, for some appropriate part of the EFM signal arriving on line 212, an EFM signal which represents binary data pointing to the segments 712 and 714 and indicating the number of channel clock cycles (or an approximation thereof) that were actually recorded within such segments. Alternatively, instead of recording the number of channel clock cycles in each test segment, the processor 853 can cause the signal processor 846 to record a relationship between the channel clock cycles determined for the two test segments. The signal processor 846 then resumes transferring EFM data from input signal line 212 onto

PCT/US97/09122

its output signal line 812. In this way, the appropriate information has now been recorded in segment 716 (Fig. 7) of the disk 243.

In yet another embodiment, the optical deflector 242 responds to a signal 248 being produced by a signal generator 247 as in Fig. 2. The signal processor 846, instead of inserting data into the EFM data stream, instead provides a data signal to the signal generator 247 which encodes it, for example by frequency, phase or amplitude modulation, onto the signal 248. Thus, a wobble pattern is created on the disk 243, having indications encoded thereon which point to the tracks 712 and 714 and which specify the number of channel clocks to expect in each of such segments.

In one embodiment, the EFM signal 212 is provided by a host computer 810 with an intentionally constant channel clock frequency and the signal processor 846 maintains that frequency. All the variations in channel clock frequency as actually recorded on the disk 243 result from inherent spin rate variations. In another embodiment, the signal processor 846 intentionally varies the channel clock frequency with which it provides the EFM signal 812. Such an embodiment would cause variations in the spatial channel clock frequency on segments 712 and 714, even if the spin motor 216 managed to maintain an exactly constant linear recording velocity.

WO 97/45836

PCT/US97/09122

-27-

Fig. 12 is a symbolic block diagram of pertinent parts of an embodiment of the signal processor 846, for use in an embodiment having an intentionally varied channel clock frequency, in which the data indicating the number of channel clocks which were actually recorded in the test segment(s) is written as ordinary data or subcode data to segment 716. The input EFM data stream 212 is provided to an EFM decoder 1210, which converts it to binary data and provides it to the data input port of a first-in-first-out memory (FIFO) 1212. The decoder 1210 also recovers the channel clock from the input EFM data 212 and uses it to clock the input address counter of the FIFO 1212. The output data port of FIFO 1212 is connected to one input port of a multiplexer 1214, the other input port of which, at an appropriate time, receives the channel clock count information from processor 853. The processor 853 also has a selection output which is connected to the select input of multiplexer 1214. The binary data output of FIFO 1212 is also provided to the processor 853. The output address counter of FIFO 1212 is clocked by an output channel clock 1216, the frequency of which is controlled by an adjust signal from processor 853. The output channel clock signal also clocks a counter 1220, which receives a reset input signal from processor 853 and provides a count output signal to processor 853. The output of multiplexer 1214, which is still in binary form, is provided to an EFM encoder 1218 to form the EFM output signal 812. Note that in an embodiment in which the channel clock frequency is not intentionally varied across the disk, the FIFO 1212 and the output channel clock 1216 can be omitted.

WO 97/45836

PCT/US97/09122

-28-

In operation, the input EFM signal provided by host computer 810 at a fixed channel clock rate is converted to binary by decoder 1210 and clocked into the FIFO 1212. In normal operation, the output channel clock 1216 operates at the same frequency as the input channel clock, so data is read out of FIFO 1212 at the same rate as it is written, thereby maintaining a constant difference between read address and write address. The binary data read from FIFO 1212 passes through multiplexer 1214 and through the encoder 1218 to form the EFM signal 812 at the same channel clock rate as the input EFM signal 212.

When the processor 853 detects from the binary data output of FIFO 1212 that data is about to be written to test segment 712, the processor 853 waits for the next timing signal from sensor 850. At that time it allows counter 1220 to begin counting channel clocks, and also it controls the output channel clock to slow down (or speed up) the output channel clock frequency by the desired amount. The FIFO 1212 is deep enough to accommodate the different data rates for writing data to and reading data from the FIFO 1212, for at least the period of segment 712.

When processor 853 receives the next timing signal from sensor 850, indicating the end of test segment 712, it reads and stores the channel clock count from counter 1220, resets counter 1220, and causes output channel clock 1216 to return to the same frequency as the input channel clock derived from the input EFM signal 212. (In another embodiment, instead of resetting the counter 1220 before counting and then reading and storing the channel clock count from the counter after counting, the processor 853 can simply note the start and stop counts and store the difference

WO 97/45836

PCT/US97/09122

-29-

between them.) If there is more than one test segment, the apparatus of Fig. 12 repeats this process, perhaps with an opposite adjustment in the output channel clock frequency in order to return the FIFO output address counter to a normal desired difference from the input address counter.

Later, when the processor 853 determines from the binary data being written to the disk that data is now being written to segment 716, processor 853 begins providing the channel clock count information previously read from counter 1220, to the multiplexer 1214. It controls multiplexer 1214 to select such count information at appropriate bit positions in order to substitute the count information for whatever data was in such bit positions previously. In this manner the apparatus of Figs. 8 and 12 intentionally varies the channel clock frequency as recorded on the disk in the test segment(s), and writes into segment 716 an indication of the number of channel clocks actually recorded in such test segment(s).

For the "relative data amount" aspect of the present invention, the same apparatus as shown in Figs. 8 and 12 may be used, except that the multiplexer 1214 (Fig. 12) may be omitted because processor 853 does not need to substitute any data for data previously existing in the input EFM signal 212. Instead, the processor 853 merely controls the output channel clock frequency within the two test segments to ensure that the two segments contain the correct relative number of channel clocks.

In an embodiment in which the average radii of the two test segments are substantially different but the number of channel clock cycles to be written in each test segment is to be the same (or approximately

WO 97/45836

PCT/US97/09122

-30-

the same), the processor controls the output channel clock frequencies such that f_{cc2} is approximately equal to $(r_1/r_2)f_{cc1}$ where f_{cc1} is the output channel clock frequency used within test segment 712, f_{cc2} is the output channel clock frequency used within test segment 714, r_1 is the average radius of test segment 712 and r_2 is the average radius of test segment 714. Similar calculations can be made in the track-to-track alignment embodiment, to ensure that the timing marks are written at the desired angular distance apart on the two test segments.

C. Reading Apparatus

Fig. 9 is a block diagram of an optical disk reproduction device which detects unauthorized optical disks using the speed variation aspect of the present invention. It is the same as the apparatus of Fig. 5, except that the processor 536 includes a speed variation program 910 instead of the wobble detect program 538.

Fig. 10 is a flowchart describing the operation of the speed variation program 910. Beginning in a step 1010, the program waits until the disk 512 is set in the optical disk reader of Fig. 9. In a step 1012, the processor 536 signals the pickup servo 534 to move the laser pickup to a predetermined address on the optical disk, for example to the address of frame 716 (Fig. 7). In step 1014, the program reads the pointer to the test segment of the disk (for example, segment 712), and the number of channel clocks to expect within the segment. If more than one segment on the disk is to be tested, the pointers and the number of clocks to expect in each test segment can be read at this time as well.

In a step 1016, the program 910 causes the pickup servo 534 to move the laser pickup 514 to the proper

WO 97/45836

PCT/US97/09122

-31-

radius to read the segment 712 identified in the frame 716. The program then obtains the number of channel clock cycles which occur within the segment 712, for example by using a hardware counter (not shown) similar to counter 1220 in Fig. 12 (step 1018). In a step 1020, the program compares the number of clocks detected in step 1018 to the number of clocks expected, as read from the frame 716. If the two numbers are not within a predetermined range of each other, then the apparatus determines the disk 512 to be an unauthorized copy, and issues the alarm signal 542 (step 1022). For example, the apparatus might stop the reproduction. If the two numbers are within the predetermined range of each other, then the program has determined the disk 512 to be an authorized copy (step 1024), and reproduction continues.

Note that if the pointer to the test track and the number of clocks to expect are encoded in a different manner on the optical disk 512, then steps 1012 and 1014 are adjusted accordingly. For example, if the information is encoded on a sub-code channel, then these steps select the appropriate frame or frames and collect the sub-code bits which contain the desired information. Similarly, if the information is encoded on a wobble pattern, then steps 1012 and 1014 select the appropriate part of the disk at which the wobble pattern contains the desired information, and retrieves the information from a decoding of the tracking error signal. In this case, the processor 536 would receive the tracking error signal from the laser pickup 514 as in the apparatus of Fig. 5, and the program would extract the desired information via software.

Fig. 11 is a flowchart of the speed variation program 910 for the "relative data amount" embodiment

WO 97/45836

PCT/US97/09122

-32-

of the speed variation aspect of the invention. In a step 1110, the program waits until the disk 512 is set in the reading apparatus. In a step 1112, the program causes the pickup servo 534 to move the laser pickup 514 to the radius of a first predetermined test segment, such as segment 712 (Fig. 7). In a step 1114, the program obtains the number of channel clocks which occur in the segment 712. In a step 1116, if the second test segment is not immediately subsequent to the first along the spiral centerline of the disk, then the program causes the pickup servo 534 to move the laser pickup 514 to the radius of the second predetermined test segment, such as segment 714 (Fig. 7). In step 1118, the program obtains the number of channel clocks which occur in the second test segment 714. In a step 1120, the program compares the two channel clock counts from the two test segments, and determines (step 1122) whether their difference or ratio is within the predetermined range. If not, then the disk is determined to be an illegal copy and the processor 536 asserts the alarm signal 542 (step 1124). If the difference is within the predetermined range, then in step 1126, the program determines the disk 512 to be a legal copy, and reproduction continues.

The flowcharts of Figs. 10 and 11 each include one or more steps of counting the number of channel clocks within a test segment. In one embodiment, the apparatus of Fig. 9 includes a revolution sensor similar to sensor 850 in the recording apparatus (Fig. 8), and the processor 536 knows to start and stop the count by reference to the timing signals provided by such a sensor. In another embodiment, the expense of a revolution sensor is avoided by using the following

WO 97/45836

PCT/US97/09122

-33-

method to obtain an approximation of the number of channel clocks within the test segment.

First, the processor 536 controls the pickup servo 534 to move the laser pickup 514 to a radius slightly short of the radius of the test segment (e.g., segment 712). The disk speed stabilizes somewhat, and the PLL 522 recovering the channel clock stabilizes as well. When the pickup reaches the address of the desired test segment, channel clock counting begins. Then, based on some event closely tied to an exact location on disk, such as the next subcode sync mark, the processor 536 controls the pickup servo 534 to cause the pickup 514 to jump back exactly one track. The frequency of the channel clock after the jump may not be exactly the same as it was prior to the jump, but it will be close enough for an approximation. Also, the PLL 522 is designed in a conventional manner to quickly recover phase lock after the jump. Counting then continues until the disk rotates back to the originally detected address of the desired test segment, at which point counting terminates.

The count determined by this method now represents one complete revolution of the disk (the length, in the present embodiment, of the test segment 712). The segment whose channel clocks are counted by this method may not be exactly the same as the segment whose clocks were counted upon recording, but the approximation should nevertheless be close enough to enable easy determination of the authenticity of the disk.

In addition, the above method for obtaining a channel clock count can be shortened by noting that much of the counting takes place in frames which are already known to contain exactly 588 channel clocks.

WO 97/45836

PCT/US97/09122

-34-

Thus counting can actually stop after the backwards jump, at the next detected frame address. The remainder of the counting can be replaced by a calculation of 588 times the number of complete frames between the newly
5 detected address and the address at which counting began. Other variations and simplifications will also be apparent.

In addition to the above, other techniques also exist for determining whether the channel clock
10 count(s) in one or more test segment(s) is (are) appropriate. For example, in the track-to-track alignment embodiment, the following method may be used to determine authenticity. First, the pickup head is positioned at the first test segment. When the
15 particular kind of mark is detected, the pickup head is then repositioned at the second test segment. If the particular kind of mark does not appear within a predefined range of time after it appeared in the first test segment, then the disk is determined to be
20 unauthentic and the alarm is issued. It will be appreciated that for this embodiment, the predefined angular distance should be sufficient to allow time for the pickup to seek from the first test segment to the second.

25 It should be understood that in both Figs. 5 and 9, the processor 536 (or parts of it) can be located externally. In addition, it should be noted that an embodiment of the invention can include both forms of copy protection (wobble detection and speed variation)
30 by including appropriate programs in the processor 536.

The foregoing description of preferred embodiments of the present invention has been provided for the purposes of illustration and description. It is not intended to be exhaustive or to limit the

WO 97/45836

PCT/US97/09122

-35-

invention to the precise forms disclosed. Obviously,
many modifications and variations will be apparent to
practitioners skilled in this art. The embodiments
were chosen and described in order to best explain the
5 principles of the invention and its practical
application, thereby enabling others skilled in the art
to understand the invention for various embodiments and
with various modifications as are suited to the
particular use contemplated. It is intended that the
10 scope of the invention be defined by the following
claims and their equivalents.

WO 97/45836

PCT/US97/09122

-36-

CLAIMS

What is claimed is:

1. An optical disk having data bit indications along a spiral centerline of said disk, said bit indications defining a channel clock having a frequency of f_{cc} clock cycles per unit of arcuate length along said centerline, said data bit indications further defining a radial wobble about said centerline, along at least a predefined segment of said centerline, said wobble having substantially greater energy at a predefined frequency f_{cpw} than at a frequency of $f_{cc}/196$.
2. A disk according to claim 1, wherein said predefined frequency f_{cpw} is approximately equal to $f_{cc}/392$.
3. A disk according to claim 1, wherein said predefined frequency f_{cpw} is an integer subharmonic of $f_{cc}/196$.
4. A disk according to claim 1, wherein said bit indications define said radial wobble along all of said spiral centerline.
5. A disk according to claim 1, wherein said wobble has data encoded thereon.
6. A disk according to claim 5, wherein said data is frequency modulated onto said wobble.
7. An optical disk having data bit indications along a spiral centerline of said disk, said bit indications defining a channel clock having a frequency of f_{cc} clock cycles per unit of arcuate length along said centerline, said data bit indications further defining a radial wobble about said centerline, along at least a predefined segment of said centerline, said wobble having substantially greater energy at a frequency f_{cpw} than at a predefined reference frequency

WO 97/45836

PCT/US97/09122

-37-

f_{REF} , where f_{CPW} is approximately equal to an integer sub-harmonic of $f_{CC}/196$.

8. A disk according to claim 7, wherein f_{CPW} is equal to said integer sub-harmonic of $f_{CC}/196$.

9. A disk according to claim 7, wherein f_{CPW} is approximately equal to $f_{CC}/392$.

10. A disk according to claim 7, wherein f_{CPW} is approximately equal to $f_{CC}/392$ and $f_{REF} = f_{CC}/196$.

11. A method for making an optical disk in response to a data bit stream, comprising the steps of:
writing bit indications in response to said data bit stream onto said disk along a substantially spiral centerline of said disk, in accordance with a channel clock having a frequency of f_{CC} clocks per unit of arcuate length along said centerline;

wobbling said bit indications radially about said centerline, along at least a predefined segment of said centerline, in accordance with a predefined wobble pattern,

said wobble pattern having substantially greater energy at a predefined frequency f_{CPW} than at a frequency of $f_{CC}/196$.

12. A method according to claim 11, wherein said predefined frequency f_{CPW} is approximately equal to $f_{CC}/392$.

13. A method according to claim 11, wherein said predefined frequency f_{CPW} is an integer subharmonic of $f_{CC}/196$.

14. A method according to claim 11, wherein said step of wobbling said bit indications comprises a step of wobbling said bit indications along all of said spiral centerline.

WO 97/45836

PCT/US97/09122

-38-

15. A method according to claim 11, for use further with wobble data, wherein said predefined wobble pattern has said wobble data encoded thereon.

16. A method according to claim 15, wherein said wobble data is frequency modulated onto said wobble pattern.

17. A method according to claim 11, further comprising a step of mastering additional disks from said optical disk.

18. A method according to claim 11, further comprising the step of reproducing said data bit stream from said bit indications on said disk.

19. A method for making an optical disk in response to a data bit stream, comprising the steps of:

writing bit indications in response to said data bit stream onto said disk along a substantially spiral centerline of said disk, in accordance with a channel clock having a frequency of f_{cc} clocks per unit of arcuate length along said centerline;

wobbling said bit indications radially about said centerline, along at least a predefined segment of said centerline, in accordance with a predefined wobble pattern,

said wobble pattern having substantially greater energy at a frequency f_{cpw} than at a predefined reference frequency f_{ref} , where f_{cpw} is approximately equal to an integer sub-harmonic of $f_{cc}/196$.

20. A method according to claim 19, wherein f_{cpw} is equal to said integer sub-harmonic of $f_{cc}/196$.

21. A method according to claim 19, wherein f_{cpw} is approximately equal to $f_{cc}/392$ and $f_{ref} = f_{cc}/196$.

22. Optical disk recording apparatus, for use with a data stream signal defining a channel clock

WO 97/45836

PCT/US97/09122

-39-

having a frequency of f_{cc} clocks per unit time, comprising:

a spinner for spinning a disk;

a write head disposed relative to said disk and directing a writing beam toward a surface of said disk, said writing beam being moveable radially relative to said disk so as to traverse a substantially spiral centerline of said spinning disk, said write head modulating said beam in response to said data stream signal, said write head further having a deflection signal input and deflecting said beam radially with respect to said disk in response to a signal received on said deflection signal input; and

a wobble control circuit having an output connected to said deflection signal input, said wobble control circuit producing an output signal on its output which has substantially greater energy at a predefined frequency f_{cpw} than at a frequency of $f_{cc}/196$, at least.

23. Apparatus according to claim 22, wherein said predefined frequency f_{cpw} is approximately equal to $f_{cc}/392$.

24. Apparatus according to claim 22, wherein said predefined frequency f_{cpw} is an integer subharmonic of $f_{cc}/196$.

25. Apparatus according to claim 22, wherein said wobble control circuit produces said output signal while said writing beam traverses all of said centerline.

26. Apparatus according to claim 22, for use further with wobble data, wherein said wobble control circuit encodes said wobble data onto said output signal.

WO 97/45836

PCT/US97/09122

-40-

27. Optical disk recording apparatus, for use with a data stream signal defining a channel clock having a frequency of f_{cc} clocks per unit time, comprising:

a spinner for spinning a disk;

a write head disposed relative to said disk and directing a writing beam toward a surface of said disk, said writing beam being moveable radially relative to said disk so as to traverse a substantially spiral centerline of said spinning disk, said write head modulating said beam in response to said data stream signal, said write head further having a deflection signal input and deflecting said beam radially with respect to said disk in response to a signal received on said deflection signal input; and

a wobble control circuit having an output connected to said deflection signal input, said wobble control circuit producing an output signal on its output which has substantially greater energy at a frequency f_{CPW} than at a predefined reference frequency f_{REF} , where f_{CPW} is approximately equal to an integer sub-harmonic of $f_{cc}/196$.

28. Apparatus according to claim 27, wherein f_{CPW} is equal to said integer sub-harmonic of $f_{cc}/196$.

29. Apparatus according to claim 27, wherein f_{CPW} is approximately equal to $f_{cc}/392$ and $f_{REF} = f_{cc}/196$.

30. A method for determining authenticity of an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock having a frequency of f_{cc} clocks per unit of arcuate length along said centerline, comprising the steps of:

WO 97/45836

PCT/US97/09122

-41-

detecting a wobble pattern of said bit indications about said centerline along at least a segment of said centerline;

determining whether said wobble pattern has substantially greater energy at a predefined frequency f_{CPW} than at a frequency $f_{CC}/196$; and if so, issuing an alarm.

31. A method according to claim 30, wherein said predefined frequency f_{CPW} is approximately equal to $f_{CC}/392$.

32. A method according to claim 30, wherein said predefined frequency f_{CPW} is an integer subharmonic of $f_{CC}/196$.

33. A method for determining authenticity of an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock having a frequency of f_{CC} clocks per unit of arcuate length along said centerline, comprising the steps of:

detecting a wobble pattern of said bit indications about said centerline along at least a segment of said centerline;

determining whether said wobble pattern has substantially greater energy at a frequency f_{CPW} than at a predefined reference frequency f_{REF} , where f_{CPW} is approximately equal to an integer sub-harmonic of $f_{CC}/196$; and if not,

issuing an alarm.

34. A method according to claim 33, wherein f_{CPW} is equal to said integer sub-harmonic of $f_{CC}/196$.

35. A method according to claim 33, wherein f_{CPW} is approximately equal to $f_{CC}/392$.

36. A method according to claim 33, wherein f_{CPW} is approximately equal to $f_{CC}/392$ and $f_{REF} = f_{CC}/196$.

WO 97/45836

PCT/US97/09122

-42-

37. Apparatus for determining authenticity of an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock having a frequency of f_{cc} clocks per unit of arcuate length along said centerline, comprising:

an optical pickup tracking said centerline and having a tracking error signal output;

means for detecting, at least while said pickup tracks a predetermined segment of said centerline, whether said tracking error signal has substantially greater energy at a predefined frequency f_{cpw} than at a frequency $f_{cc}/196$; and

means for issuing an alarm if so.

38. Apparatus according to claim 37, wherein said predefined frequency f_{cpw} is approximately equal to $f_{cc}/392$.

39. Apparatus according to claim 37, wherein said predefined frequency f_{cpw} is an integer subharmonic of $f_{cc}/196$.

40. Apparatus for determining authenticity of an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock having a frequency of f_{cc} clocks per unit of arcuate length along said centerline, comprising:

an optical pickup tracking said centerline and having a tracking error signal output;

means for detecting, at least while said pickup tracks a predetermined segment of said centerline, whether said tracking error signal has substantially greater energy at a frequency f_{cpw} than at a predefined reference frequency f_{ref} , where f_{cpw} is approximately equal to an integer sub-harmonic of $f_{cc}/196$; and

WO 97/45836

PCT/US97/09122

-43-

means for issuing an alarm if not.

41. Apparatus according to claim 40, wherein f_{CPW} is equal to said integer sub-harmonic of $f_{CC}/196$.

42. Apparatus according to claim 40, wherein f_{CPW} is approximately equal to $f_{CC}/392$.

43. Apparatus according to claim 40, wherein f_{CPW} is approximately equal to $f_{CC}/392$ and $f_{REF} = f_{CC}/196$.

44. An optical disk having data bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock having a frequency of f_{CC} clock cycles per unit of arcuate length along said centerline, said disk having stored thereon an indication of the number of said channel clock cycles which occur along a first predetermined segment of said centerline of said disk.

45. A disk according to claim 44, wherein said data bit indications comprise lands and pits alternating along said centerline, each given one of said pits having a respective arcuate length which is equal to an integral number of the channel clock cycles along a segment of said centerline which includes the given pit.

46. A disk according to claim 44, wherein said indication of the number of said channel clock cycles which occur along a first predetermined segment of said centerline is stored as data in said data bit indications.

47. A disk according to claim 44, further having stored thereon, in correspondence with said indication of the number of said channel clock cycles which occur along a first predetermined segment, a pointer to said first predetermined segment.

48. A disk according to claim 47, further having stored thereon:

a pointer to a second predetermined segment of said centerline; and in correspondence therewith,

49. A disk according to claim 44, wherein said data bit indications further define a radial wobble about said centerline along at least a second predetermined segment of said centerline, and wherein said indication of the number of said channel clock cycles which occur along a first predetermined segment of said centerline is stored as data that is encoded onto said wobble.

51. A disk according to claim 49, wherein said wobble pattern has a carrier frequency that is approximately equal to an integer sub-harmonic of $f_{cc}/196$.

53. A disk according to claim 44, wherein said data bit indications further define a radial wobble about said centerline along at least a second predetermined segment of said centerline, said wobble having substantially greater energy at a predefined frequency f_{CPW} than at a frequency of $f_{CC}/196$.

54. A disk according to claim 44, wherein said data bit indications further define a radial wobble about said centerline along at least a second predetermined segment of said centerline, said wobble having substantially greater energy at a frequency f_{CPW} than at a predefined reference frequency f_{REF} , wherein

WO 97/45836

PCT/US97/09122

-45-

f_{CPW} is approximately equal to an integer sub-harmonic of $f_{cc}/196$.

55. A disk according to claim 44, wherein said first predetermined segment of said centerline of said disk constitutes an integral number of revolutions of said disk.

56. A method for making an optical disk, comprising the steps of:

writing data bit indications onto said disk along a substantially spiral centerline of said disk, said data bit indications defining a channel clock having a frequency f_{cc} clock cycles per unit of arcuate length along said centerline; and

writing onto said disk an indication of a number at least approximating the number of said channel clock cycles which occur along a first predetermined segment of said centerline of said disk.

57. A method according to claim 56, wherein said step of writing an indication comprises a step of storing said indication as data in said data bit indications.

58. A method according to claim 56, further comprising the step of writing onto said disk, in correspondence with said indication, a pointer to said first predetermined segment.

59. A method according to claim 58, further comprising the steps of:

writing onto said disk a pointer to a second predetermined segment of said centerline; and

writing onto said disk in correspondence with said pointer to a second predetermined segment of said centerline, an indication of a number at least approximating the number of said channel clock cycles

WO 97/45836

PCT/US97/09122

-46-

which occur along said second predetermined segment of said centerline.

60. A method according to claim 56, further comprising the steps of:

wobbling said bit indications radially about said centerline to form a wobble pattern, along at least a predefined segment of said centerline, and

encoding said indication onto said wobble pattern.

61. A method according to claim 60, wherein said step of encoding comprises a step of frequency modulating said indication onto said wobble pattern.

62. A method according to claim 60, wherein said wobble pattern has a carrier frequency which is approximately equal to an integer sub-harmonic of $f_{cc}/196$.

63. A method according to claim 62, wherein said carrier frequency is $f_{cc}/392$.

64. A method according to claim 56, further comprising a step of wobbling said bit indications radially about said centerline, along at least a predefined segment of said centerline, in accordance with a predefined wobble pattern, said wobble pattern having substantially greater energy at a predefined frequency f_{cpw} than at a frequency of $f_{cc}/196$.

65. A method according to claim 56, further comprising a step of wobbling said bit indications radially about said centerline, along at least a second predefined segment of said centerline, in accordance with a predefined wobble pattern, said wobble pattern having substantially greater energy at a frequency f_{cpw} than at a predefined reference frequency f_{ref} , where f_{cpw} is approximately equal to an integer sub-harmonic of $f_{cc}/196$.

WO 97/45836

PCT/US97/09122

- 47 -

66. A method according to claim 56, wherein said first predetermined segment of said centerline of said disk constitutes ~~an integral~~ number of revolutions of said disk.

67. A method according to claim 56, further comprising the step of detecting said number at least approximating said number of channel clock cycles which occur along a first predetermined segment, prior to said step of writing said indication onto said disk.

68. A method according to claim 56, wherein said step of writing data bit indications comprises the steps of:

- spinning said disk at a constant linear velocity relative to a write head producing a writing beam;

- modulating said writing beam in response to a data stream containing data bits arriving in accordance with said channel clock frequency; and

- varying said channel clock frequency during said step of modulating.

69. Optical disk recording apparatus, for use with a data stream signal, comprising:

- a spinner for spinning a disk;

- a write head disposed relative to said disk and directing a writing beam toward a surface of said disk, said writing beam being moveable radially relative to said disk so as to traverse a substantially spiral centerline of said spinning disk, said write head modulating said beam in response to a beam modulation signal; and

- a data modification unit having an input for receiving said data stream signal and further having an output coupled to provide said beam modulation signal, said beam modulation signal defining a channel clock having a frequency of f_{cc} clocks per unit time, said

WO 97/45836

PCT/US97/09122

-48-

channel clock frequency varying across said disk, said data modification unit transferring said data stream signal to said beam modulation signal and inserting into said beam modulation signal an indication of a number approximately equal to the number of said channel clock cycles which occur along a first predetermined segment of said centerline of said disk.

70. Apparatus according to claim 69, further comprising a counter coupled to count said number of channel clock cycles which occur along said first predetermined segment, and coupled to provide said number to said data modification unit.

71. An optical disk recording apparatus, for use with a data stream signal, comprising:

- a spinner for spinning a disk;

- a write head disposed relative to said disk and directing a writing beam toward a surface of said disk, said writing beam being moveable radially relative to said disk so as to traverse a substantially spiral centerline of said spinning disk, said write head modulating said beam in response to said data stream signal, said write head further having a deflection signal input and deflecting said beam radially with respect to said disk in response to a signal received on said deflection signal input; and

- a wobble control circuit having an output connected to said deflection signal input, said wobble control circuit producing a wobble signal on its output, said wobble control circuit encoding onto said wobble signal an indication of a number at least approximating the number of said channel clock cycles which occur along a first predetermined segment of said centerline of said disk.

WO 97/45836

PCT/US97/09122

-49-

72. Apparatus according to claim 71, wherein said encoding comprises frequency modulation.

73. Apparatus according to claim 71, wherein said wobble control circuit further encodes onto wobble signal, in correspondence with said indication of a number at least approximating the number of said channel clock cycles which occur along a first predetermined segment, a pointer to said first predetermined segment.

74. Apparatus according to claim 71, wherein said data stream signal defines a channel clock having a frequency f_{cc} , at least while said wobble control circuit encodes said indication onto said wobble signal,

and wherein said wobble signal has a carrier frequency which is approximately equal to a sub-harmonic of $f_{cc}/196$.

75. Apparatus according to claim 71, wherein said data stream signal defines a channel clock having a frequency f_{cc} , at least while said wobble control circuit encodes said indication onto said wobble signal,

and wherein said output signal of said wobble control circuit has a frequency spectrum having substantially greater energy at a frequency f_{cpw} than at $f_{cc}/196$.

76. A method for determining authenticity of an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock, comprising the steps of:

reading from said disk an indication of an expected number of channel clock cycles;

WO 97/45836

PCT/US97/09122

-50-

determining a first number at least approximating the number of channel clock cycles occurring within a first predetermined segment of said centerline; and issuing an alarm if said first number is not within a predefined range relative to said expected number.

77. A method according to claim 76, further comprising the step of reading from said disk a pointer to said first predetermined segment, wherein said step of determining comprises a step of seeking to a position on said disk in dependence upon said pointer.

78. A method according to claim 76, wherein said step of issuing an alarm comprises the step of issuing said alarm if said first number is not equal to said expected number.

79. A method according to claim 76, wherein said step of reading comprises the steps of:

seeking to a predetermined address on said disk; and

reading said indication from data stored at said address on said disk.

80. A method according to claim 76, wherein said step of reading comprises the steps of:

detecting a wobble pattern defined by said bit indications along a second predetermined segment of said disk; and

decoding said indication from said wobble pattern.

81. Apparatus for determining authenticity of an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock, comprising:

means for reading from said disk an indication of an expected number of channel clock cycles;

WO 97/45836

PCT/US97/09122

-51-

means for determining a first number at least approximating the number of channel clock cycles occurring within a first predetermined segment of said centerline; and

means for issuing an alarm if said first number is not within a predefined range relative to said expected number.

82. Apparatus according to claim 81, further comprising:

an optical pickup tracking said centerline; and

means for reading from said disk a pointer to said first predetermined segment,

and wherein said means for determining comprises means for moving said optical pickup to a position on said disk in dependence upon said pointer.

83. Apparatus according to claim 81, wherein said means for reading comprises means for reading said indication from data stored at a predetermined address on said disk.

84. Apparatus according to claim 81, further comprising an optical pickup tracking said centerline and having a tracking error signal output, and wherein said means for reading comprises:

means for detecting a wobble pattern in said tracking error signal while said optical pickup is traversing a second predetermined segment of said disk; and

means for decoding said indication from said wobble pattern.

85. A method for making an optical disk, comprising the steps of:

writing first data bit indications onto said disk along a first predetermined segment of a substantially spiral centerline of said disk, in response to a first

WO 97/45836

PCT/US97/09122

-52-

input data stream provided at a first temporal channel clock frequency, said first data bit indications having a first spatial channel clock frequency f_{cc1} ; and

writing second data bit indications onto said disk along a second predetermined segment of said centerline, in response to a second input data stream provided at said first temporal channel clock frequency, said second data bit indications having a second spatial channel clock frequency f_{cc2} ,

wherein f_{cc1} bears a predetermined non-equal relationship to f_{cc2} .

86. A method according to claim 85, wherein said predetermined relationship is such that the number of channel clock cycles written to said second predetermined segment differs from the number of channel clock cycles written to said first predetermined segment by more than a predetermined threshold amount.

87. A method according to claim 85, wherein said predetermined relationship is such that a difference between the number of channel clock cycles written to said second predetermined segment and the number of channel clock cycles written to said first predetermined segment is within a predefined range.

88. A method according to claim 85, wherein said predetermined relationship is such that a ratio between the number of channel clock cycles written to said second predetermined segment and the number of channel clock cycles written to said first predetermined segment is within a predefined range.

89. A method according to claim 85, wherein said first and second predetermined segments are located at substantially different average radii on said disk, and wherein said predetermined relationship is such that

WO 97/45836

PCT/US97/09122

- 53 -

the number of channel clock cycles written to said second predetermined segment is within a predefined range of the number of channel clock cycles written to said first predetermined segment.

90. A method according to claim 85, wherein said first and second predetermined segments are located at substantially different average radii on said disk, and wherein said predetermined relationship is such that first and second predetermined marks appear in respectively said first and second predetermined segments separated by an angular distance which is within a predefined range.

91. A method according to claim 85, further comprising the steps of:

writing third data bit indications onto said disk along a third predetermined segment of said centerline, said third data bit indications defining a channel clock having a frequency f_{cc3} clock cycles per unit of arcuate length along said centerline; and

wobbling said third data bit indications radially about said centerline in accordance with a predefined wobble pattern, said wobble pattern having substantially greater energy at a predefined frequency f_{cpw} than at a frequency of $f_{cc3}/196$.

92. A method according to claim 85, further comprising the steps of:

writing third data bit indications onto said disk along a third predetermined segment of said centerline, said third data bit indications defining a channel clock having a frequency f_{cc3} clock cycles per unit of arcuate length along said centerline; and

wobbling said third data bit indications radially about said centerline in accordance with a predefined wobble pattern, said wobble pattern having

WO 97/45836

PCT/US97/09122

-54-

substantially greater energy at a frequency f_{CPW} than at a predefined reference frequency f_{REF} , where f_{CPW} is approximately equal to an integer sub-harmonic of $f_{CC3}/196$.

93. A method according to claim 85, wherein one of said first and second predetermined segments of said centerline of said disk constitutes an integral number of revolutions of said disk.

94. A method according to claim 85, wherein said step of writing first data bit indications comprises the steps of:

demodulating said first input data stream to form a first demodulated data stream;

remodulating said first demodulated data stream in accordance with said first channel clock frequency f_{CC1} , to form a first remodulated data stream;

spinning said disk at a constant linear velocity relative to a write head producing a writing beam; and
modulating said writing beam in response to said first remodulated data stream while said writing beam is writing said first predetermined segment,

and wherein said step of writing second data bit indications comprises the steps of:

demodulating said second input data stream to form a second demodulated data stream;

remodulating said second demodulated data stream in accordance with said second channel clock frequency f_{CC2} , to form a second remodulated data stream;

spinning said disk at said constant linear velocity relative to a write head producing a writing beam; and

modulating said writing beam in response to said second remodulated data stream while said writing beam is writing said second predetermined segment.

WO 97/45836

PCT/US97/09122

-55-

95. Optical disk recording apparatus, comprising:

a spinner for spinning a disk;
a write head disposed relative to said disk and directing a writing beam toward a surface of said disk, said writing beam being moveable radially relative to said disk so as to traverse a substantially spiral centerline of said spinning disk, said write head modulating said beam in response to a beam modulation signal; and

a modulation signal provider which provides said beam modulation signal in accordance with a first channel clock frequency f_{cc1} when said beam is traversing a first predetermined segment of said centerline, and which provides said data stream signal in accordance with a second channel clock frequency f_{cc2} when said beam is traversing a second predetermined segment of said centerline, said spinner spinning said disk at a first linear velocity when said beam is traversing said first predetermined segment of said centerline and spinning said disk at a second linear velocity substantially equal to said first linear velocity when said beam is traversing said second predetermined segment of said centerline,

wherein f_{cc1} bears a predetermined non-equal relationship to f_{cc2} .

96. Apparatus according to claim 95, wherein said data stream provider comprises:

a demodulator having an input coupled to receive an input data stream and further having an output, said demodulator demodulating a signal in said input data stream in accordance with a channel clock of said first input data stream;

WO 97/45836

PCT/US97/09122

-56-

a first-in-first-out memory having a data input port coupled to the output of said demodulator, said first-in-first-out memory further having a data output port;

a remodulator coupled to the data output port of said first-in-first-out memory, said remodulator further having a remodulation clock input and further having an output for carrying said beam modulation signal, said remodulator remodulating data from said first-in-first-out memory in accordance with said remodulation clock input; and

a controller having a clocking output coupled to said remodulation clock input and providing on said clocking output a clock signal having said first channel clock frequency f_{cc1} , while said writing beam is writing said first predetermined segment, and providing on said clocking output a clock signal having said second channel clock frequency f_{cc2} , while said writing beam is writing said second predetermined segment.

97. Apparatus according to claim 95, wherein said write head further has a deflection signal input and deflects said writing beam radially with respect to said disk in response to a signal received on said deflection signal input, further comprising:

a wobble control circuit having an output connected to said deflection signal input, said wobble control circuit producing an output signal on its output which has substantially greater energy at a frequency f_{cpw} than at a predefined reference frequency f_{ref} , where f_{cpw} is approximately equal to an integer sub-harmonic of $f_{cc}/196$.

98. Apparatus according to claim 95, wherein said write head further has a deflection signal input and deflects said writing beam radially with respect to

WO 97/45836

PCT/US97/09122

-57-

said disk in response to a signal received on said deflection signal input, further comprising:

a wobble control circuit having an output connected to said deflection signal input, said wobble control circuit producing an output signal on its output which has substantially greater energy at a frequency f_{CPW} than at a predefined reference frequency f_{REF} , where f_{CPW} is approximately equal to an integer sub-harmonic of $f_{CC3}/196$.

99. Apparatus according to claim 95, wherein one of said first and second predetermined segments of said centerline of said disk constitutes an integral number of revolutions of said disk.

100. A method for determining authenticity of an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock which has a first frequency of f_{CC1} clocks per unit of arcuate length along a first predetermined segment of said centerline and which has a second frequency of f_{CC2} clocks per unit of arcuate length along a second predetermined segment of said centerline, comprising the steps of:

determining whether f_{CC1} bears a predetermined non-equal relationship to f_{CC2} ; and
issuing an alarm if not.

101. A method according to claim 100, wherein said predetermined relationship is such that the number of channel clock cycles occurring in said second predetermined segment differs from the number of channel clock cycles occurring in said first predetermined segment by more than a predetermined threshold amount.

102. A method according to claim 100, wherein said predetermined relationship is such that a

WO 97/45836

PCT/US97/09122

-58-

difference between the number of channel clock cycles occurring in said second predetermined segment and the number of channel clock cycles occurring in said first predetermined segment is within a predefined range.

103. A method according to claim 100, wherein said predetermined relationship is such that a ratio between the number of channel clock cycles occurring in said second predetermined segment and the number of channel clock cycles occurring in said first predetermined segment is within a predefined range.

104. A method according to claim 100, wherein said first and second predetermined segments are located at substantially different average radii on said disk, and wherein said predetermined relationship is such that the number of channel clock cycles occurring in said second predetermined segment is within a predefined range of the number of channel clock cycles occurring in said first predetermined segment.

105. A method according to claim 100, wherein said first and second predetermined segments are located at substantially different average radii on said disk, and wherein said step of determining comprises the steps of:

reading a first predetermined mark in said first predetermined segment at a first time;

seeking to said second predetermined segment;

reading a second predetermined mark in said second segment at a second time; and

determining whether said second time bears a second predetermined relationship to said first time.

106. A method according to claim 105, wherein said second predetermined relationship is such that a

WO 97/45836

PCT/US97/09122

-59-

difference between said first and second times is within a predefined expected time range.

107. A method according to claim 100, further comprising the steps of:

- detecting a wobble pattern of said bit indications about said centerline along at least a segment of said centerline;

- determining whether said wobble pattern has substantially greater energy at a frequency f_{CPW} than at a predefined reference frequency f_{REF} , where f_{CPW} is approximately equal to an integer sub-harmonic of $f_{CC}/196$; and

- issuing an alarm if not.

108. Optical disk reproduction apparatus, for use with an optical disk having bit indications along a substantially spiral centerline of said disk, said bit indications defining a channel clock which has a first frequency of f_{CC1} clocks per unit of arcuate length along a first predetermined segment of said centerline and which has a second frequency of f_{CC2} clocks per unit of arcuate length along a second predetermined segment of said centerline, comprising:

- a pickup head disposed relative to said disk;

- a spinner spinning said disk at a substantially constant linear velocity relative to said pickup head, at least while said pickup head traverses said first and second predetermined segments, said pickup head detecting the bit indications along said centerline of said disk and producing a pickup data bit stream in response thereto; and

- an authenticity detection unit coupled to receive said data bit stream, said authenticity detection unit issuing an alarm if said first frequency f_{CC1} does not

WO 97/45836

PCT/US97/09122

-60-

bear a predetermined non-equal relationship to said second frequency f_{cc2} .

109. Apparatus according to claim 108, wherein said authenticity detection unit comprises:

means for determining a first number at least approximating the number of channel clock cycles which occur in said first predetermined segment;

means for determining a second number at least approximating the number of channel clock cycles which occur in said second predetermined segment; and

means for issuing said alarm if said first number does not bear a second predetermined relationship to said second number.

110. Apparatus according to claim 108, wherein said first and second predetermined segments are located at substantially different average radii on said disk, and wherein said authenticity detection unit comprises:

means for reading a first predetermined mark in said first predetermined segment at a first time;

means for seeking to said second predetermined segment;

means for reading a second predetermined mark in said second segment at a second time; and

means for issuing said alarm if said first time does not bear a second predetermined relationship to said second time.

111. Apparatus according to claim 110, wherein said second predetermined relationship is such that a difference between said first and second times is within a predefined expected time range.

PCT/US97/09122

FIG. 1

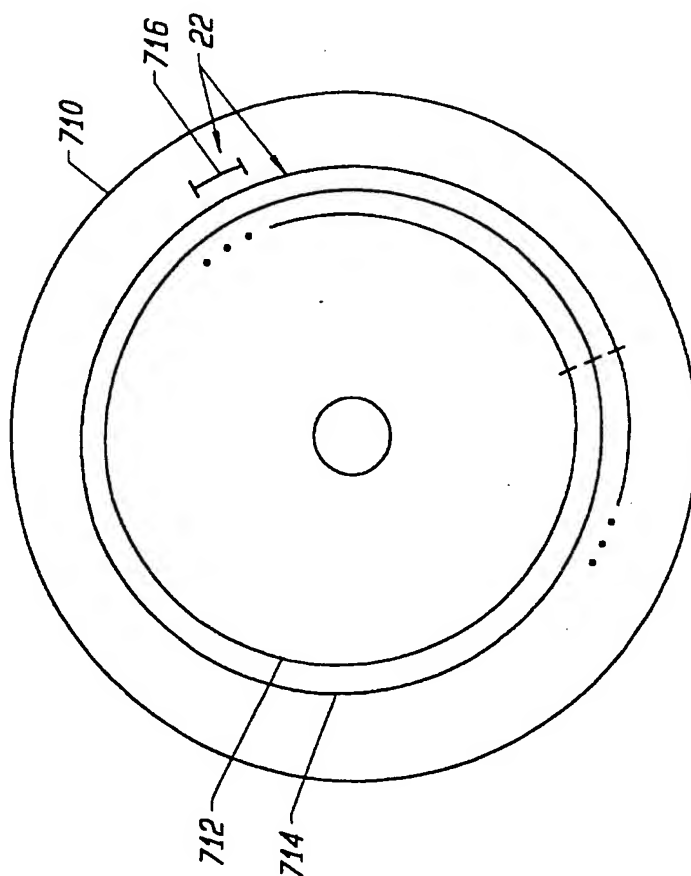


FIG. 7

WO 97/45836

PCT/US97/09122

2/11

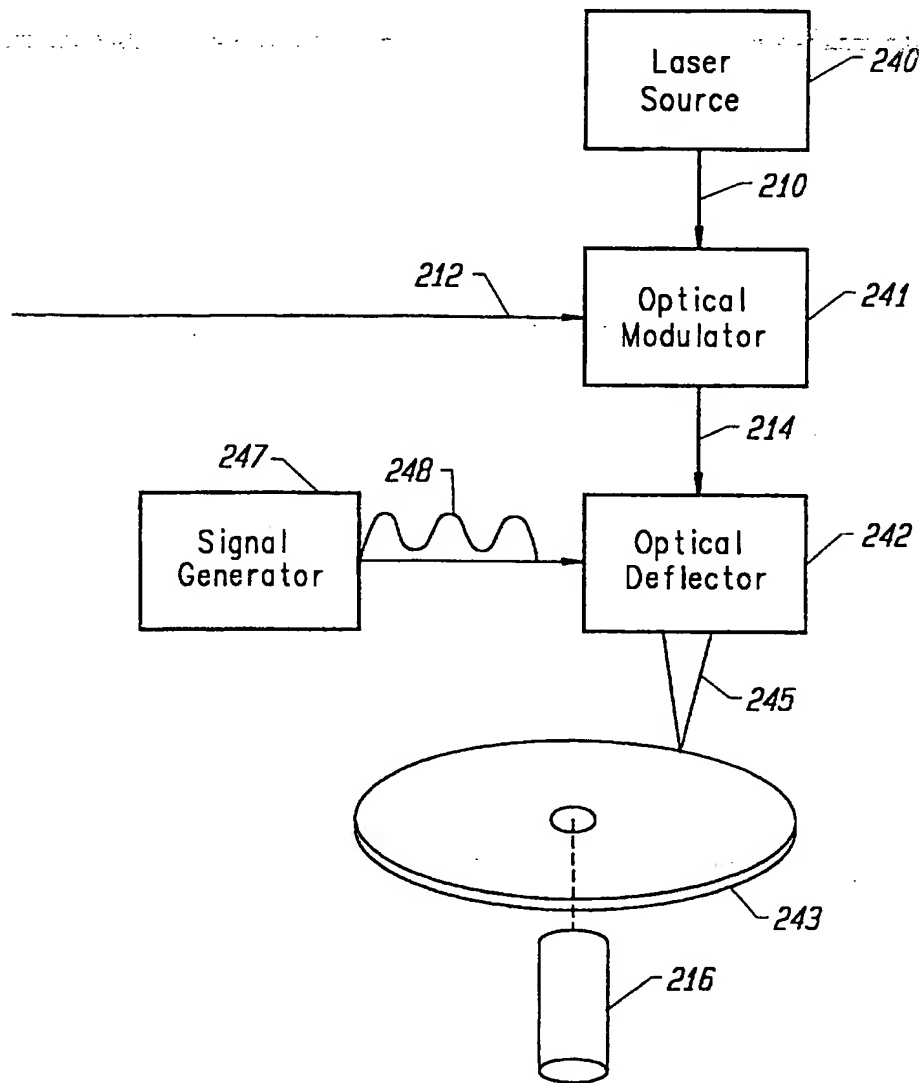


FIG. 2

WO 97/45836

PCT/US97/09122

3/11

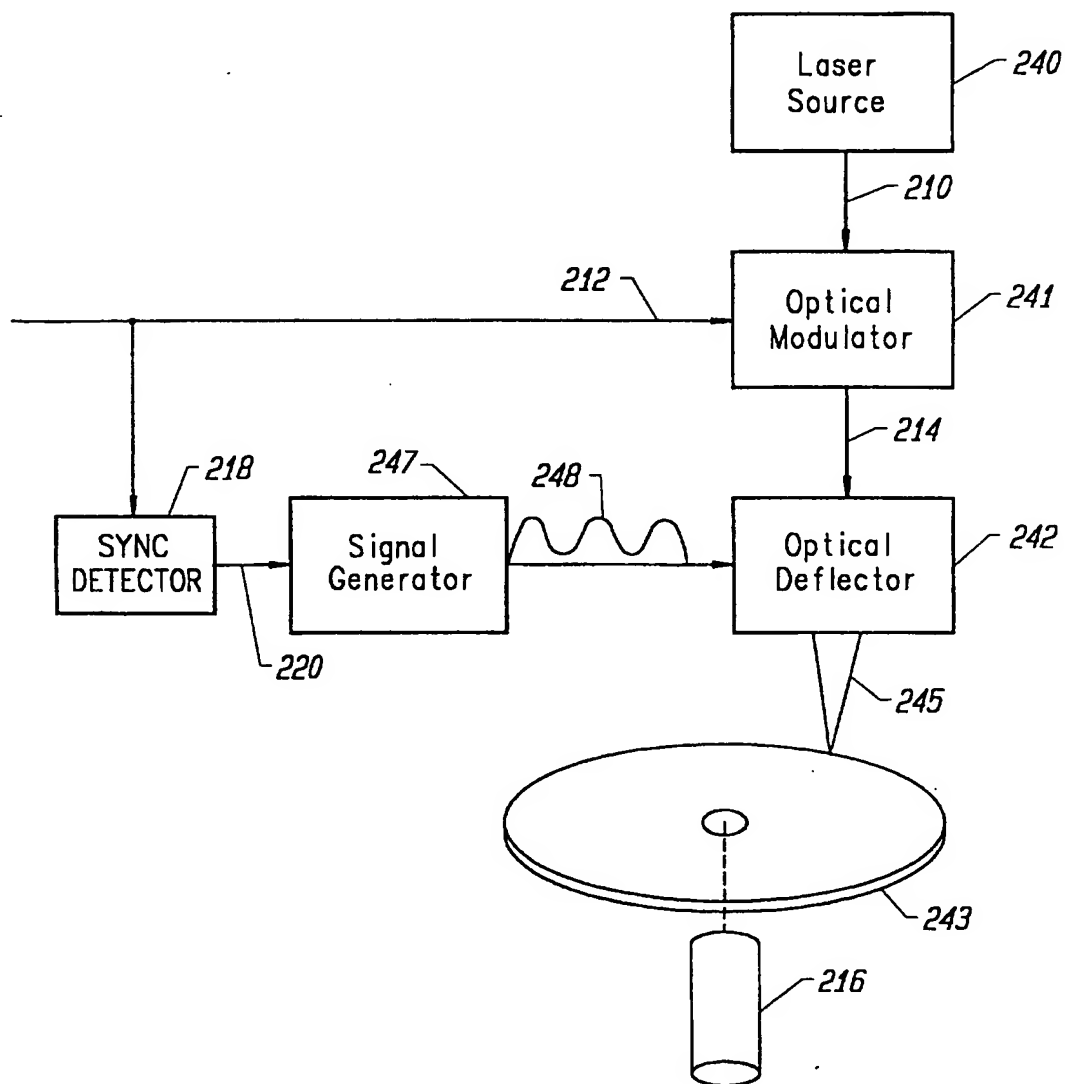


FIG. 3

WO 97/45836

PCT/US97/09122

4/11

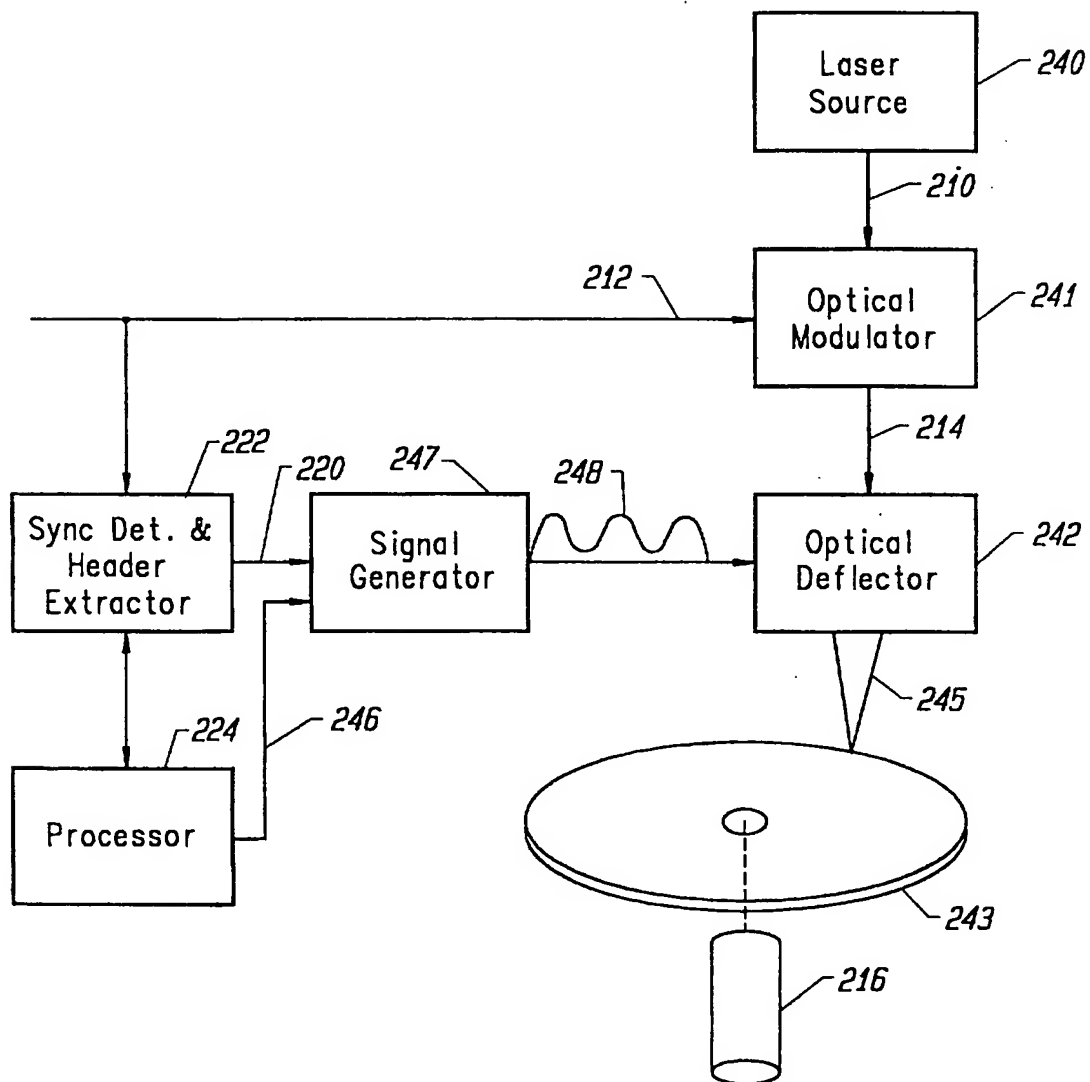


FIG. 4

WO 97/45836

PCT/US97/09122

5/11

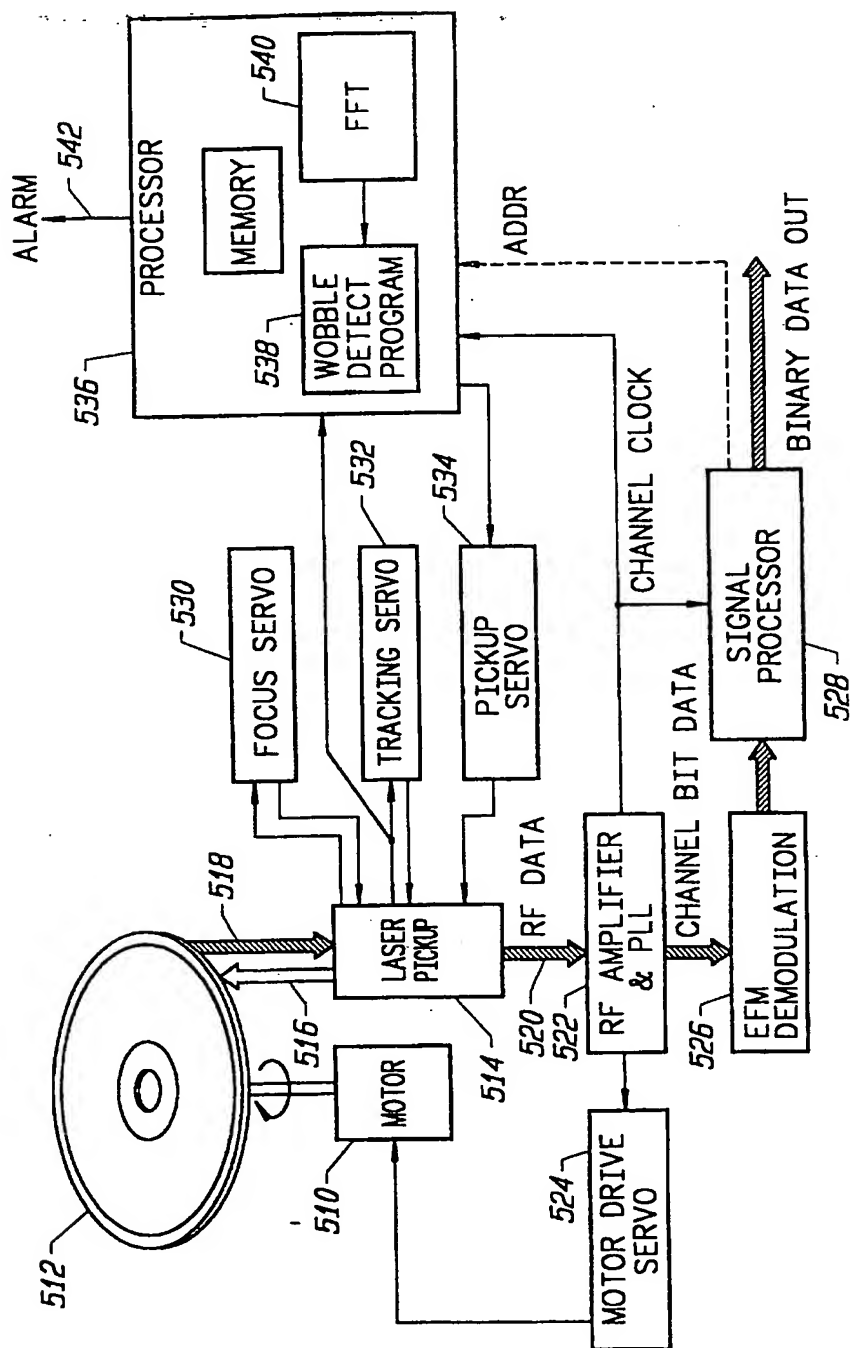


FIG. 5

WO 97/45836

PCT/US97/09122

6/11

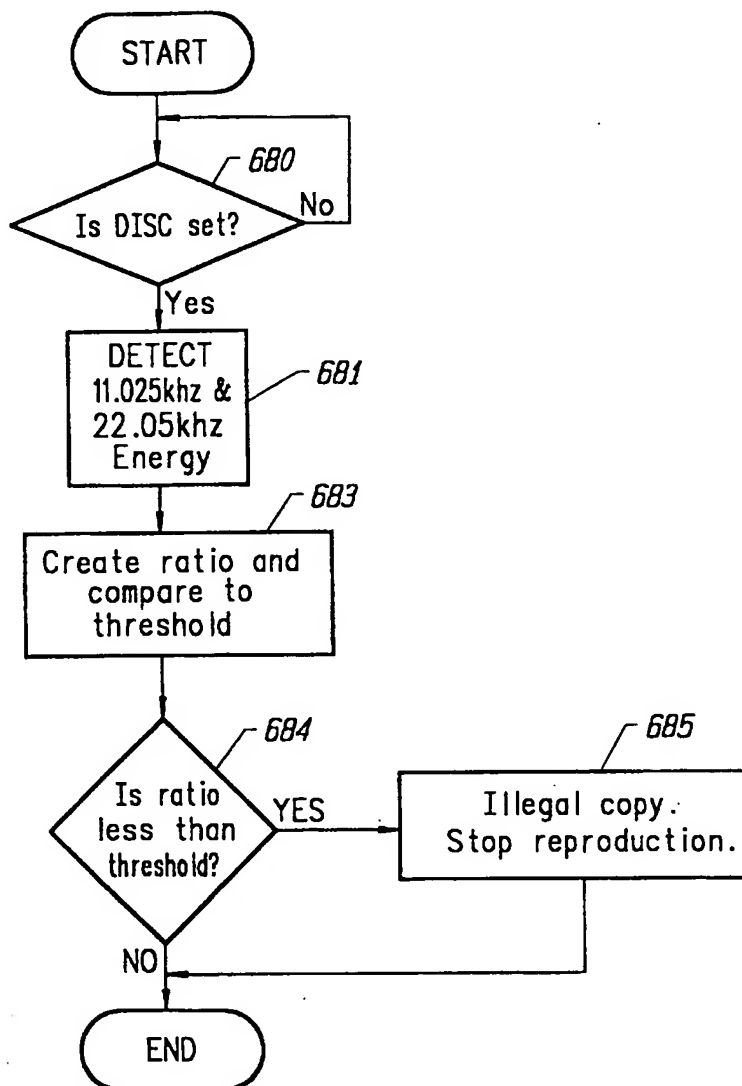


FIG. 6

WO 97/45836

PCT/US97/09122

7/11

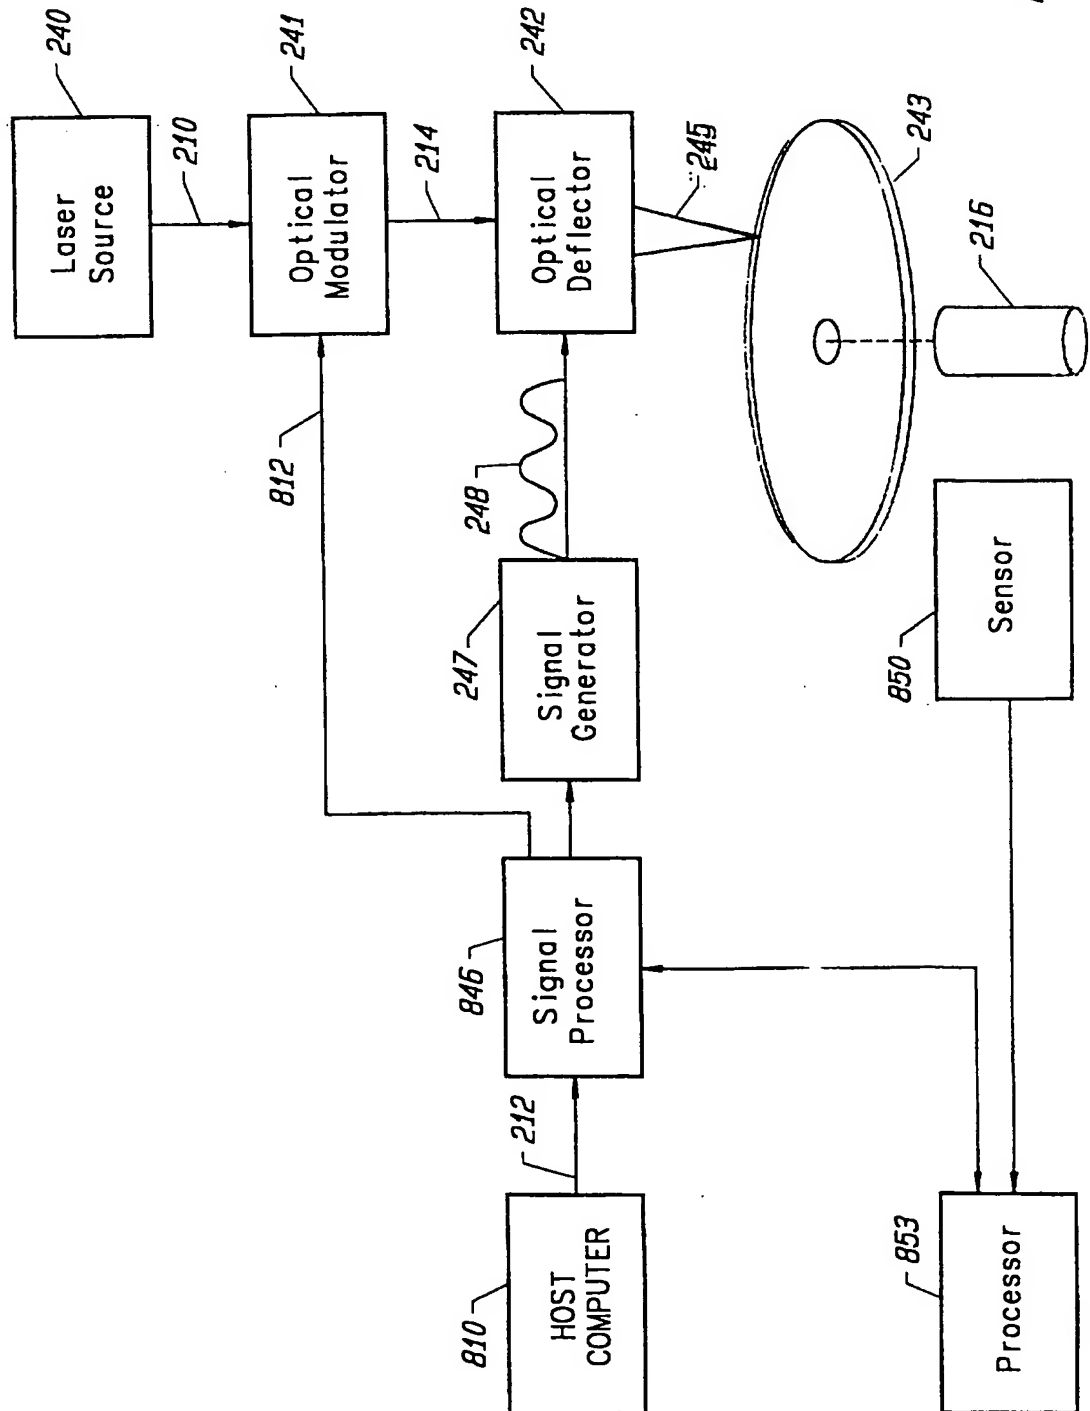


FIG. 8

WO 97/45836

PCT/US97/09122

8/11

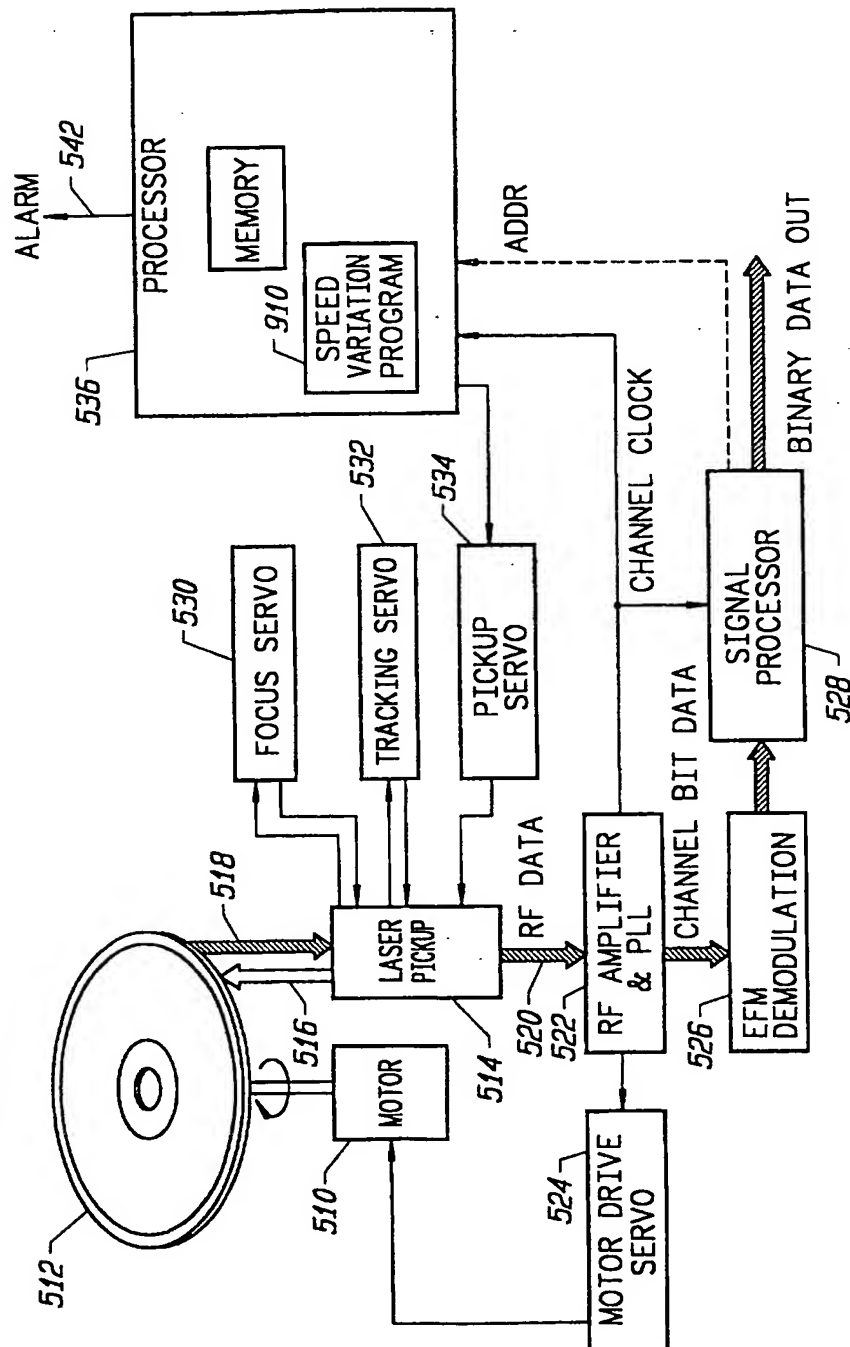


FIG. 9

PCT/US97/09122

9/11


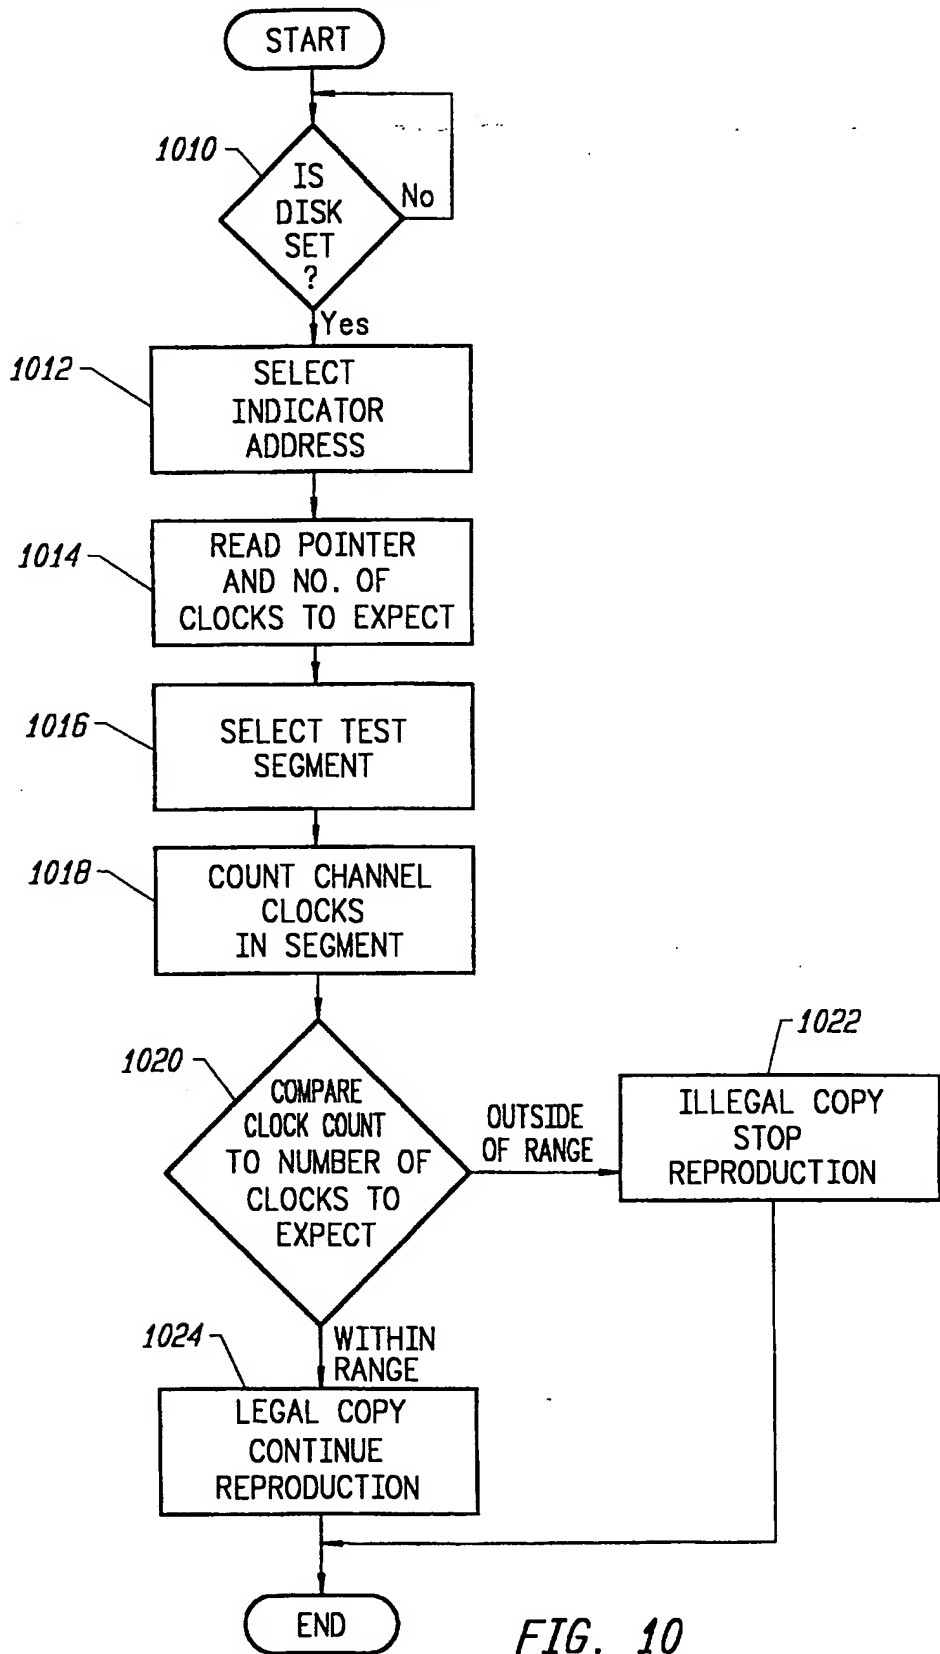


FIG. 10

PCT/US97/09122



WO 97/45836

PCT/US97/09122

11/11

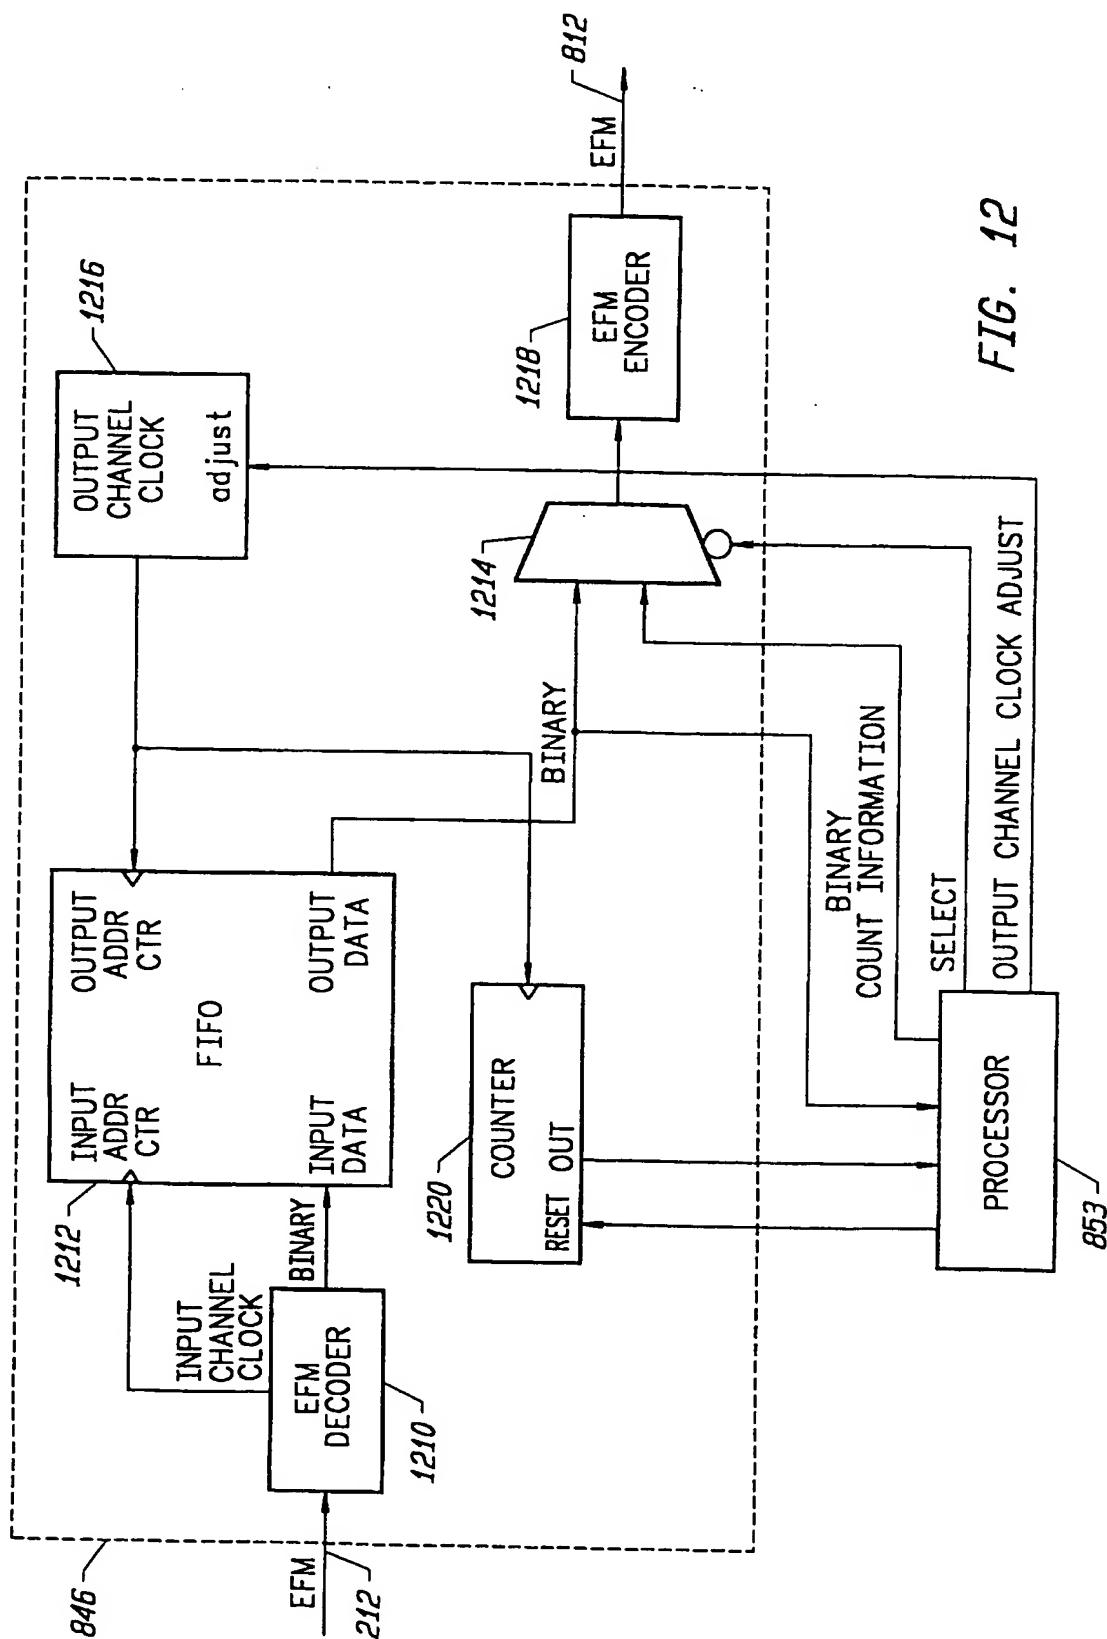


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/09122

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G11B 7/24, 7/09, 3/90

US CL : 369/275.4, 47, 58

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 369/275.3, 48, 47, 54, 58, 59, 44.13, 275.4

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
APSElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A, 4,972,401 (CARASSO ET AL.) 20 NOVEMBER 1990 (20.11.90)	NONE
A	US,A, 5,109,369 (MAEDA ET AL.) 28 APRIL 1992 (28.04.92)	NONE
A	US,A 5,297,125 (YAMAGAMI ET AL.) 22 MARCH 1994 (22.03.94)	NONE
A	US,A 5,436,770 (MUTO ET AL.) 25 JULY 1995 (25.07.95)	NONE



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 SEPTEMBER 1997

Date of mailing of the international search report

29 OCT. 1997

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

for NABIL HINDI

Telephone No. (703) 308-1555